




200LM/W

AURA Back-lit LED Panel Light

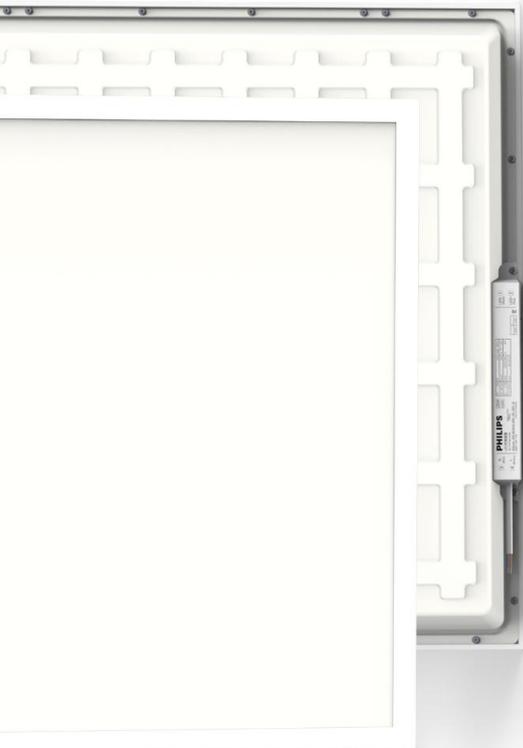

HIGH EFFICACY
up to 200LM/W



ENERGY STAR
STRONG LUMEN • 强流明




A

18
kwh/1000h

2015

Product Technical Parameter

| | | | | | | |
|-----------------------|--|------|--|------|---|------|
| Model | AURA-301218-3K UGR<19 AURA-301218-4K UGR<19 | | AURA-606018-4K AURA-606018-3K UGR<19 AURA-606018-4K UGR<19 | | AURA-626218-4K AURA-626218-4K UGR<19 | |
| PF | ≥0.95 | | | | | |
| Efficacy (lm/W)±5% | 200 | | | | | |
| Power Switchable (W) | 18 | 25 | 18 | 25 | 18 | 25 |
| Lumen Output±5% | 3600 | 5000 | 3600 | 5000 | 3600 | 5000 |
| CRI | Ra>80 | | | | | |
| Input Voltage(V) | 220-240VAC | | | | | |
| Driver | PHILIPS | | | | | |
| CCT Switchable | 3000K-4000K-6000K | | | | | |
| Warranty | 5 Years | | | | | |
| IP rate | IP20 | | | | | |
| Operating Temperature | -10°C to 45°C | | | | | |
| LED Type | SMD 2835 | | | | | |
| Certification | TUV CE ERP LM79 ROHS | | | | | |

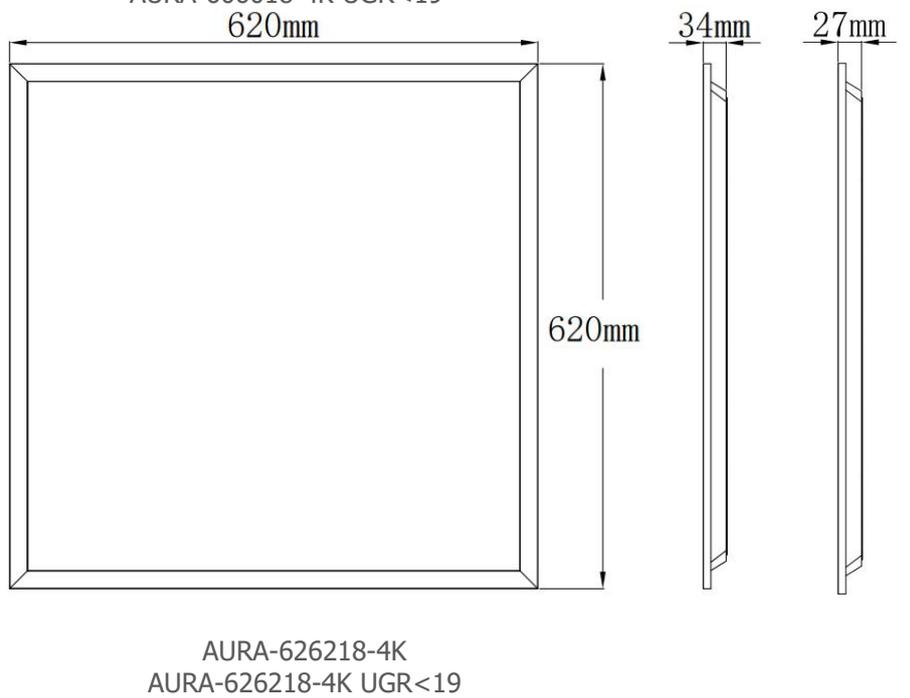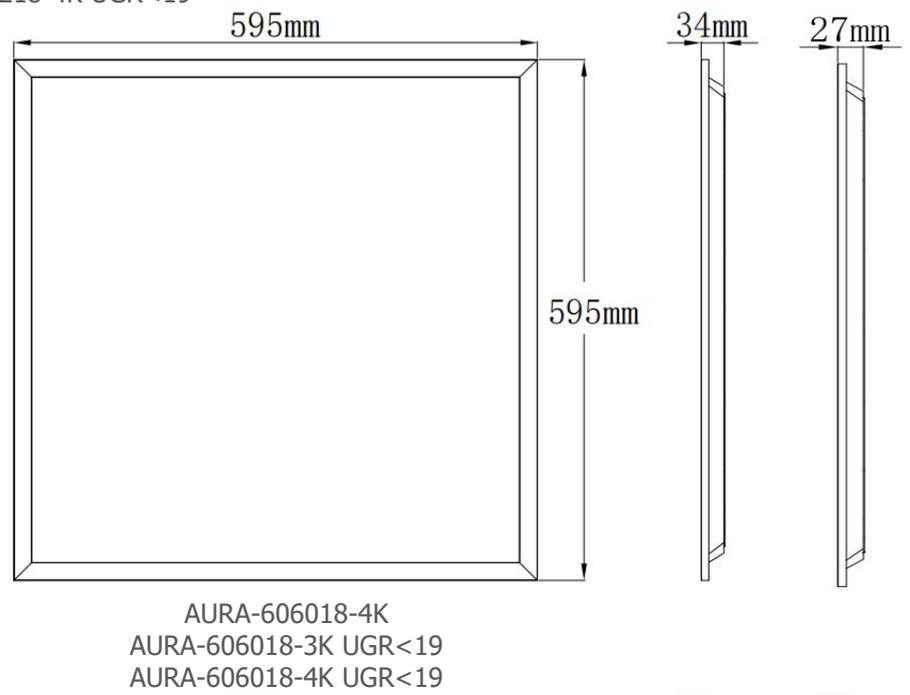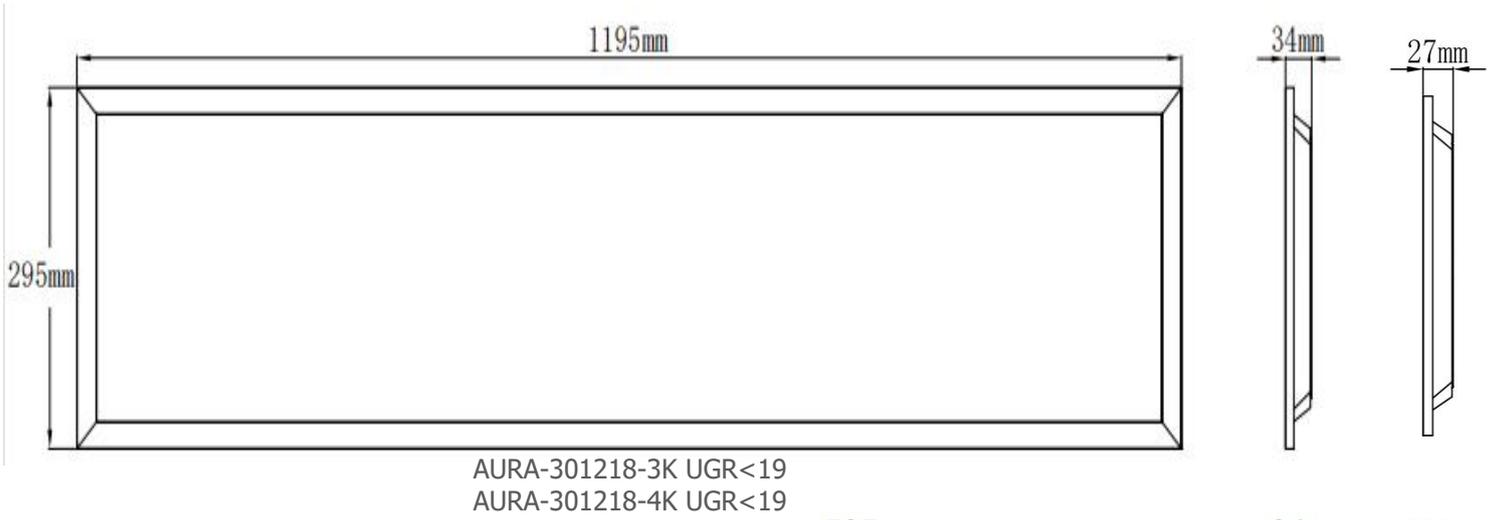

Introduction of Product Settings



Adjustable Power

- There is a power switch button on the power supply to adjust the power
- When The Power Switchable Botton Is At 18W Is 18W, At 25W Is 25W
- Philips power supply has passed the following certifications: CE, ENEC, UKCA and CCC.





CCT Switchable

- There is a base with switchable color temperature on the lamp
- When The CCT Switchable Botton Is At 3000K Is 3000K, At 4000K Is 4000K
- CCT Can Be Freely Combined, Such as 3000K+4000K, 3000K+6000K, 4000K+6000K, 3000K+4000K+5000K etc




Product Structure Diagram

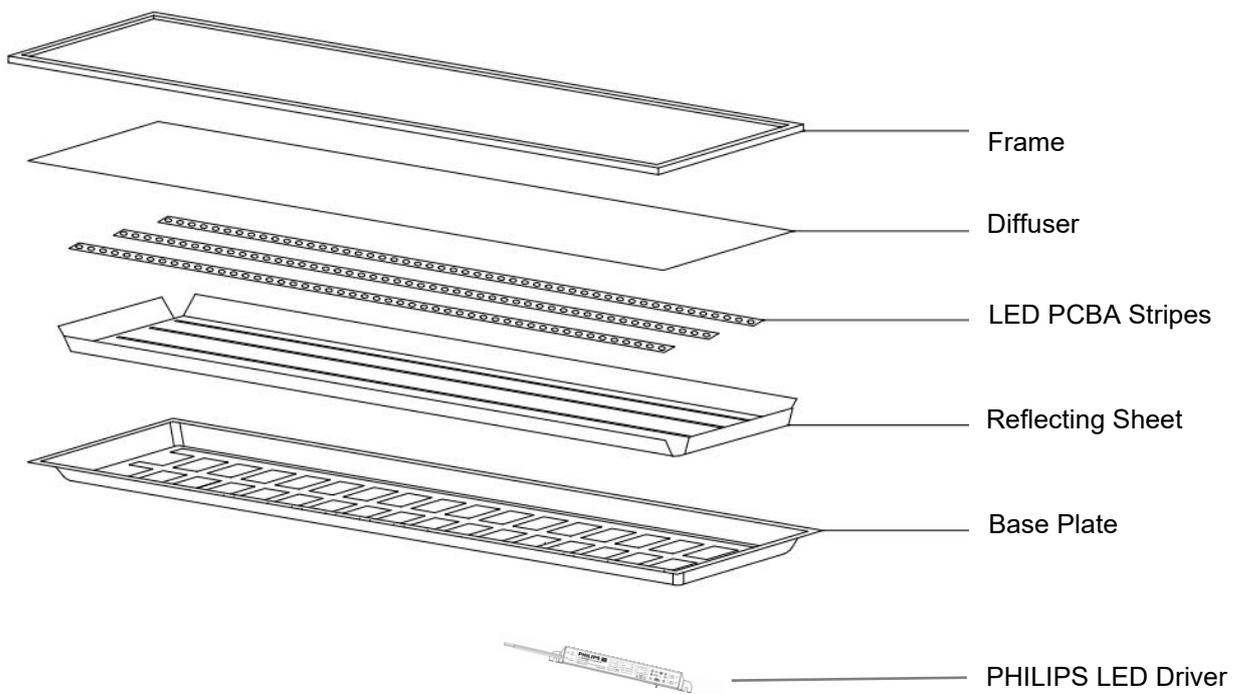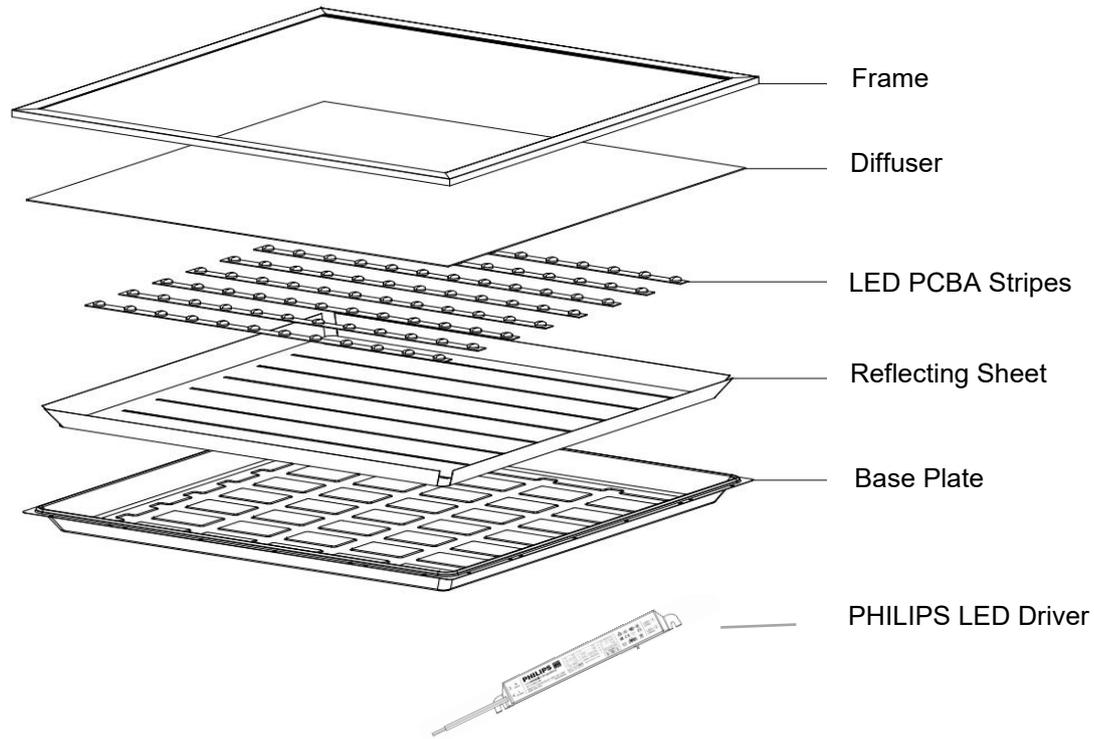


Installation Methods


INSTALLATION 1

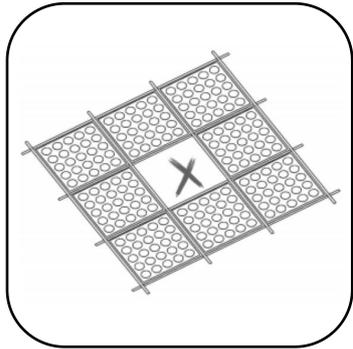


1.Remove The Ceiling Where Need To Install The Panel Light;

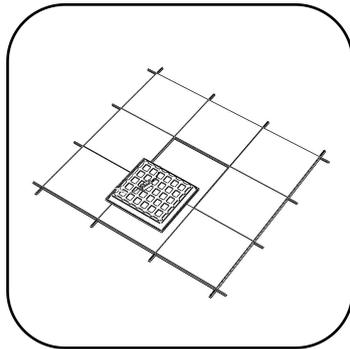

2.Connect The AC Input Wire of The Driver To The Electric Supply And Then Connect The Driver With The Connector of The Lamp;

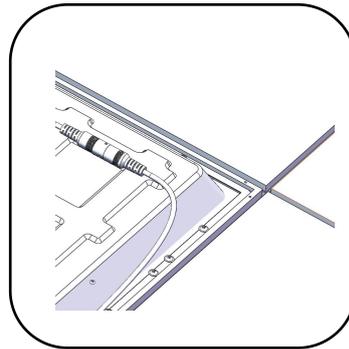


3. Put The Remaining Part of The Driver Wire To The Corner Hole of The Panel To Avoid The Panel Falling;

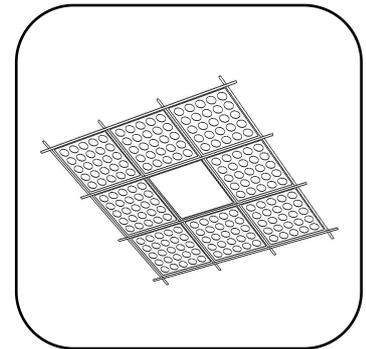


4.Put The Panel To The Ceiling Hole, The Installation Is Finished.


INSTALLATION 2

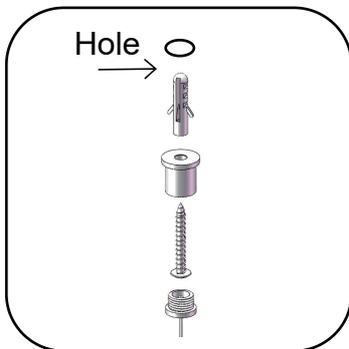


1. Fix The 4 Sockets To The Ceiling With Screws;

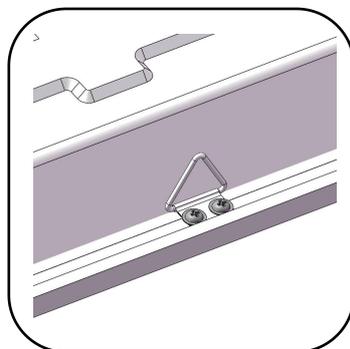

2. Unscrew The Existing Screws Then Fasten The Triangle Rings On The Panel With Them;

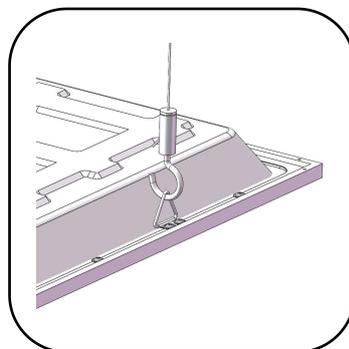


3. Fasten The Suspension Ropes To The Panel, Adjust The Length Of The Suspension Rope To The Desired Length;

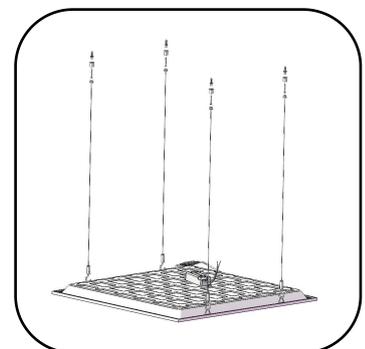


4. Fix The Panel To The Ceiling And Make Final Adjustments For Desired Height And Angle, Connect the Led Driver To Ac Mains Power, Installation Finished.


INSTALLATION 3

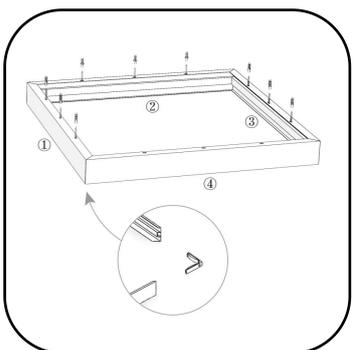


1. Assemble The Frame ①②③④, Mount The Frame ①②③ To The Ceiling With Screws;

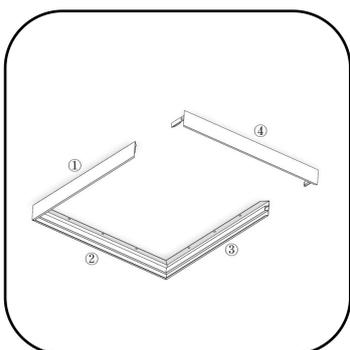

2. Take Off The Frame ④;

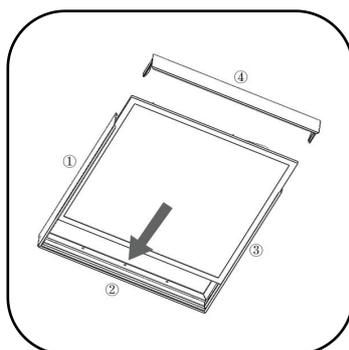


3. Connect The AC Input Wire Of The Driver To The Electric Supply And Then Connect The Driver With The Connector Of The Lamp, Slide In The Panel;

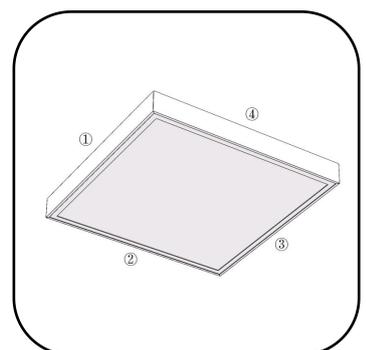


4. Close The Frame 4 Again After Safety Test, Installation Finished.


INSTALLATION 4

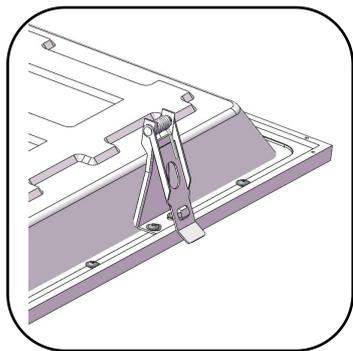


1. Unscrew the existing screws and nuts then fasten the 4 jump rings on the panel with them;

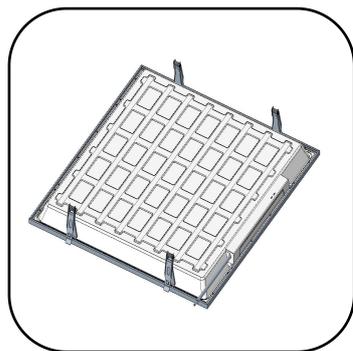

2. Connect the AC input wire of the driver to the Electric supply and then connect the driver With the connector of the lamp;

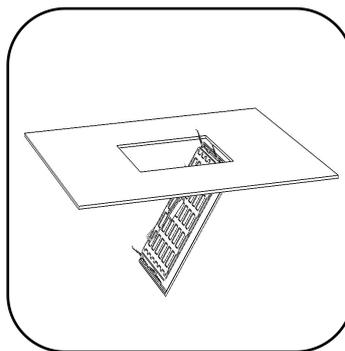

3. Insert the jump rings into the pre-opened hole;

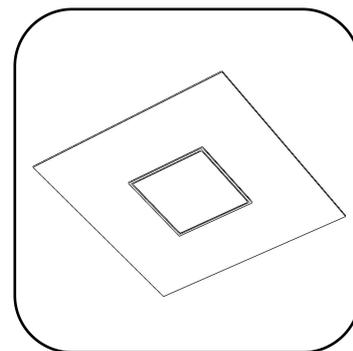

4. The installation is finished.




WARNING !

1. Please Make Sure To Turn Off The Power Before Starting The Installation.
2. The Light Source of This Lamp Is Not Replaceable, When The Light Source Reaches Its End Of Life The Whole Luminaire Should Be Replaced.
3. Making Installation Only By Certified Electrician

Packaging Diagram

Industrial Packaging

| Model | Carton Box Size(mm) | Net weight(KG)/PC | G.W/1PC±0.2KG | PCS/Carton | PCS/20GP | PCS/40GP | PCS/40HQ |
|--|-------------------------------|-------------------|---------------|------------|----------|----------|----------|
| AURA-301218-3K UGR<19 AURA-301218-4K UGR<19 | Outer Cartons L1220*W300*H325 | 1.6 | 10.6 | 5 | 1856 | 3896 | 4480 |
| AURA-606018-4K AURA-606018-3K UGR<19 AURA-606018-4K UGR<19 | Outer Cartons L620*W300*H625 | 1.6 | 10.6 | 5 | 1800 | 3720 | 4352 |
| AURA-626218-4K AURA-626218-4K UGR<19 | Outer Cartons L645*W300*H650 | 1.72 | 11.2 | 5 | 1800 | 3744 | 4416 |

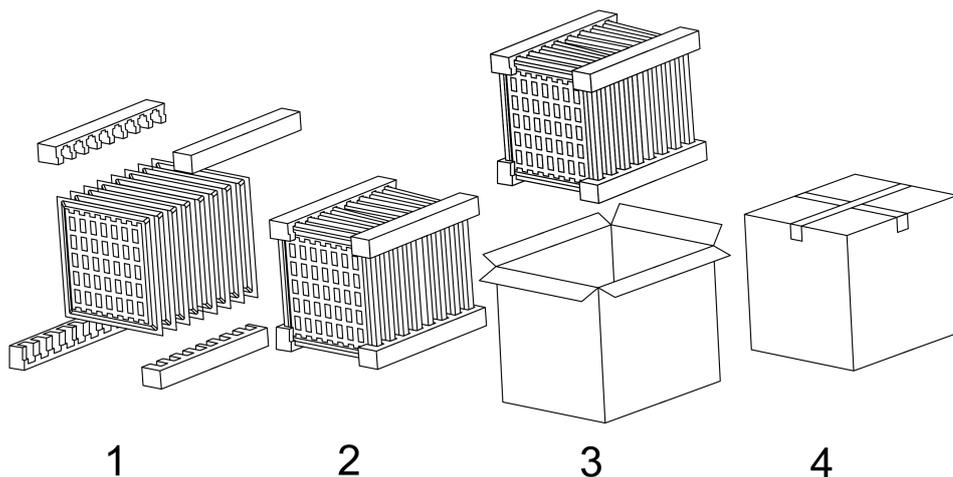

Packaging Diagram

Commercial Packaging

| Model | Carton Box Size(mm) | | Net weight(KG)/PC | G.W/1PC±0.2KG | PCS/Carton | PCS/20GP | PCS/40GP | PCS/40HQ |
|--|---------------------|-----------------|-------------------|---------------|------------|----------|----------|----------|
| AURA-301218-3K UGR<19 AURA-301218-4K UGR<19 | Outer Cartons | L1220*W220*H340 | 1.6 | 10.6 | 5 | 1750 | 3625 | 4065 |
| AURA-606018-4K AURA-606018-3K UGR<19 AURA-606018-4K UGR<19 | Outer Cartons | L620*W220*H64 | 1.6 | 10.6 | 5 | 1800 | 3690 | 4200 |
| AURA-626218-4K AURA-626218-4K UGR<19 | Outer Cartons | L650*W230*H655 | 1.7 | 11.2 | 5 | 1620 | 3060 | 3720 |

