
## **LED linear lighting system**


# LUMOLUX

#### **Safety Notice:**

•Installation must be carried out by a professional electrician to ensure that the lighting fixtures have been disconnected from the power supply.


•This lighting fixture needs to be installed in a 3 wires/1 phases or 4 wires/3 phases track guide.

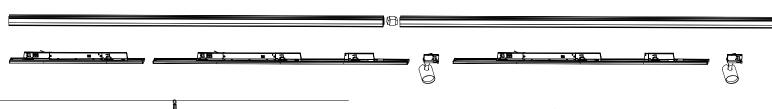


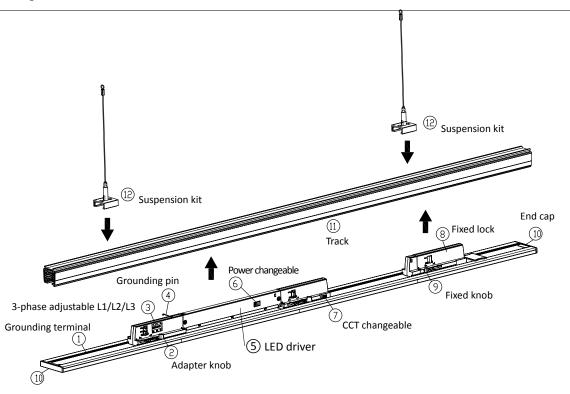

Step 1: In 6 power selection, set the power through DIP switch;
On the 7 dial color adjustment switch, provide a switch to set color temperature (only for adjustable color models)


3000K | 4000K | 5000K

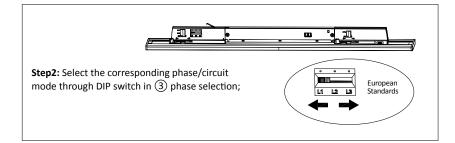


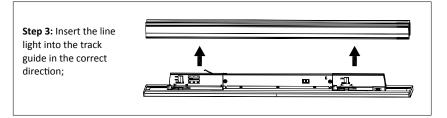

#### **Product features:**

- The perfect solution for the retail industry, stores, and supermarkets.
- Excellent quality, with a luminous efficiency of up to 160 lumens per watt (160lm/w).
- Select four power modes through DIP switches.
- The lamp can slide left and right on the track, and the installation position can be flexibly adjusted.





**Attention:** Pay attention to the positioning knob and do not install it in reverse! Incorrect installation may result in irreparable damage.


## **LED linear lighting system**




How to avoid track guide rail seam problems during installation



**Type A** If the joint of the track guide rail interferes with the position of the fixed lock, please follow the instructions in step one to operate.

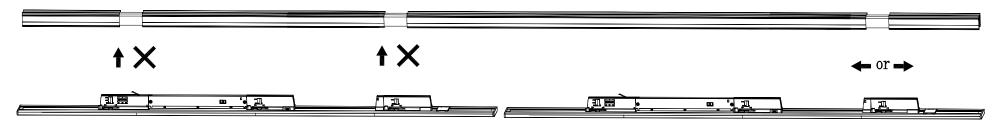


**Step 1:** Slide left or right (7) Secure lock to idle position



**Step 2:** Install the lighting fixtures onto the track

3 wires/1 phases 4 wires/3 phases

### European standard--4 wires/3 phases



- (1) L1 as a phase
- (12) L2 as a phase
- (13) L3 as a phase
- N Neutral conductor
- 1) 5 Positioning Knob

