




200LM/W

AURA Back-lit LED Panel Light

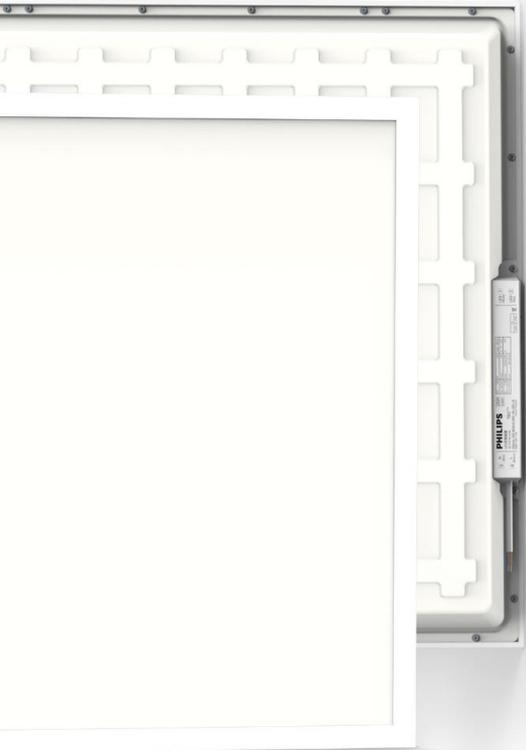

HIGH EFFICACY
up to 200LM/W



PHILIPS DRIVER

ENERGY

STRONG
LUMEN • 强流明




A	A
B	
C	
D	
E	
F	
G	

18
kwh/1000h

2015

Technical Data

Item No./Code	AU 301218-3K-U19 AU 301218-4K-U19	831831 831841	AU 606018-4K AU 606018-3K-U19 AU 606018-4K-U19	811830 811831 811841	AU 626218-4K AU 626218-4K-U19	821840 821841
P F	0.95					
Efficacy (lm/W)±5%	200					
Power Switchable(W)	18	25	18	25	18	25
Lumen Output±5%	3600	5000	3600	5000	3600	5000
CRI	Ra>80					
Input Voltage(V)	220-240VAC					
Driver	PHILIPS					
CCT Switchable	3000K-4000K-6000K					
Warranty	5 Years					
IP rate	IP20					
Operating Temperature	-10 to 45					
LED Type	SMD 2835					
Certification	TUV CE ERP LM79 ROHS					

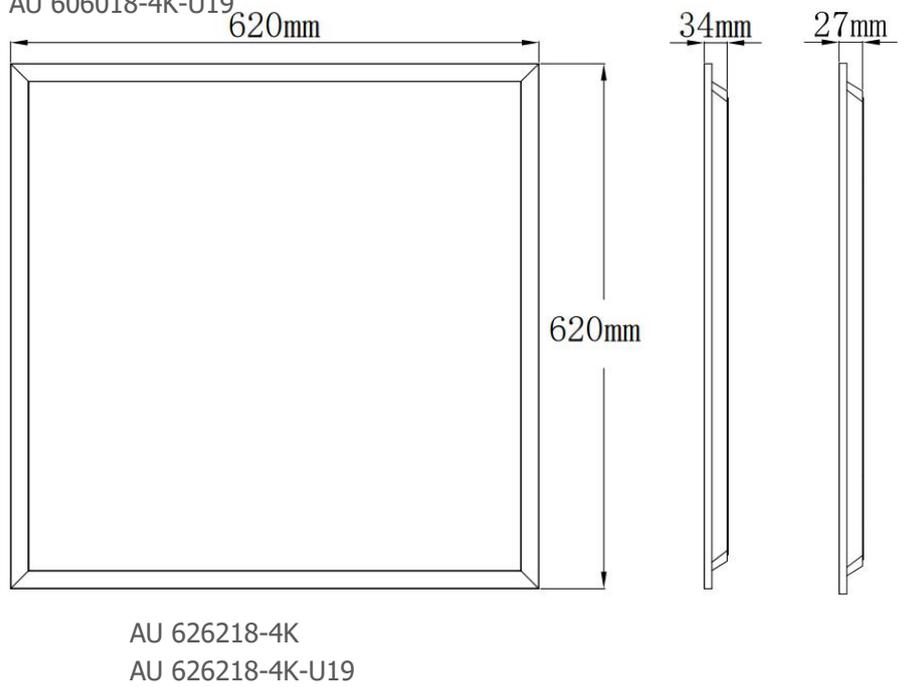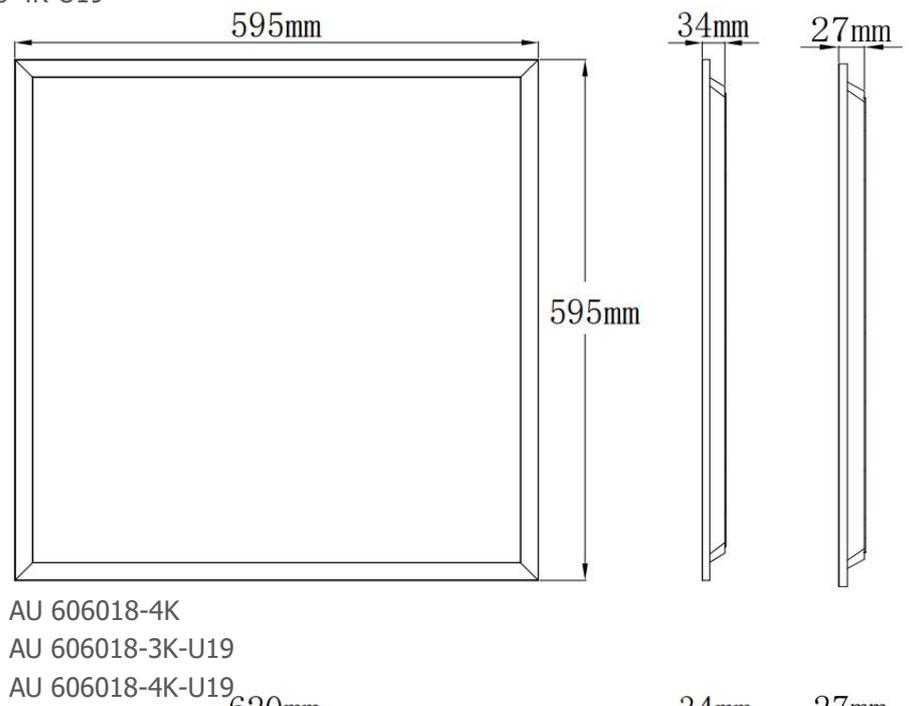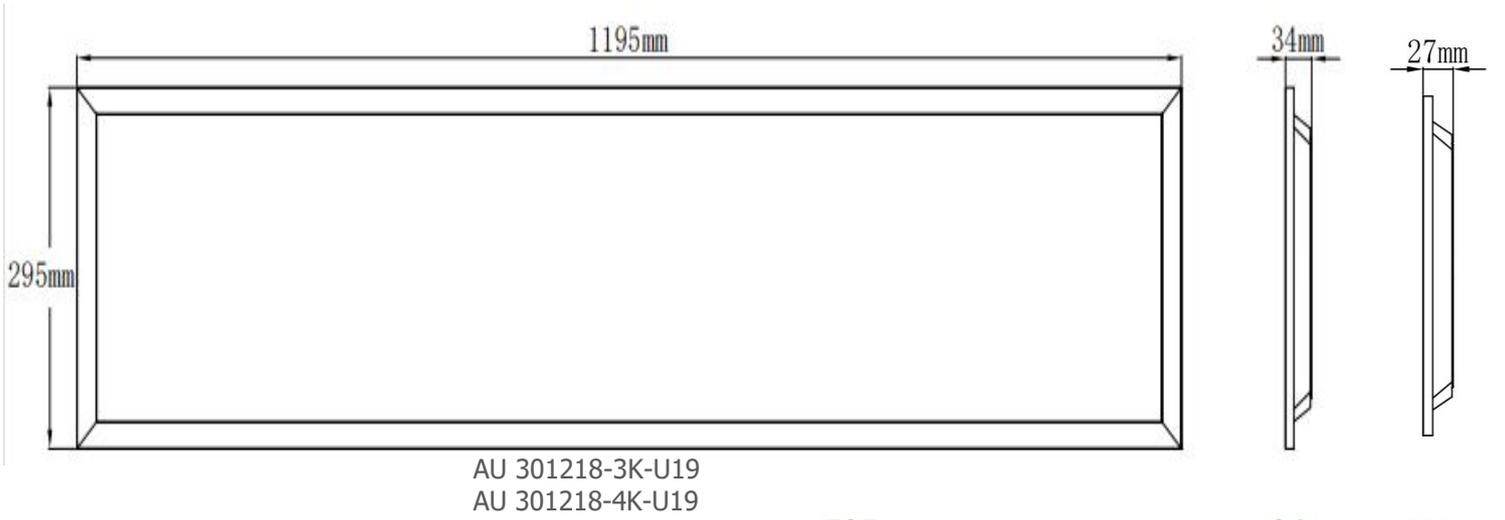

Introduction of Product Settings



Adjustable Power

- There is a power switch button on the power supply to adjust the power
- When The Power Switchable Botton Is At 18W Is 18W, At 25W Is 25W
- Philips power supply has passed the following certifications: CE, ENEC, UKCA and CCC.





CCT Switchable

- There is a base with switchable color temperature on the lamp
- When The CCT Switchable Botton Is At 3000K Is 3000K, At 4000K Is 4000K
- CCT Can Be Freely Combined, Such as 3000K+4000K, 3000K+6000K, 4000K+6000K, 3000K+4000K+5000K etc




Product Structure Diagram

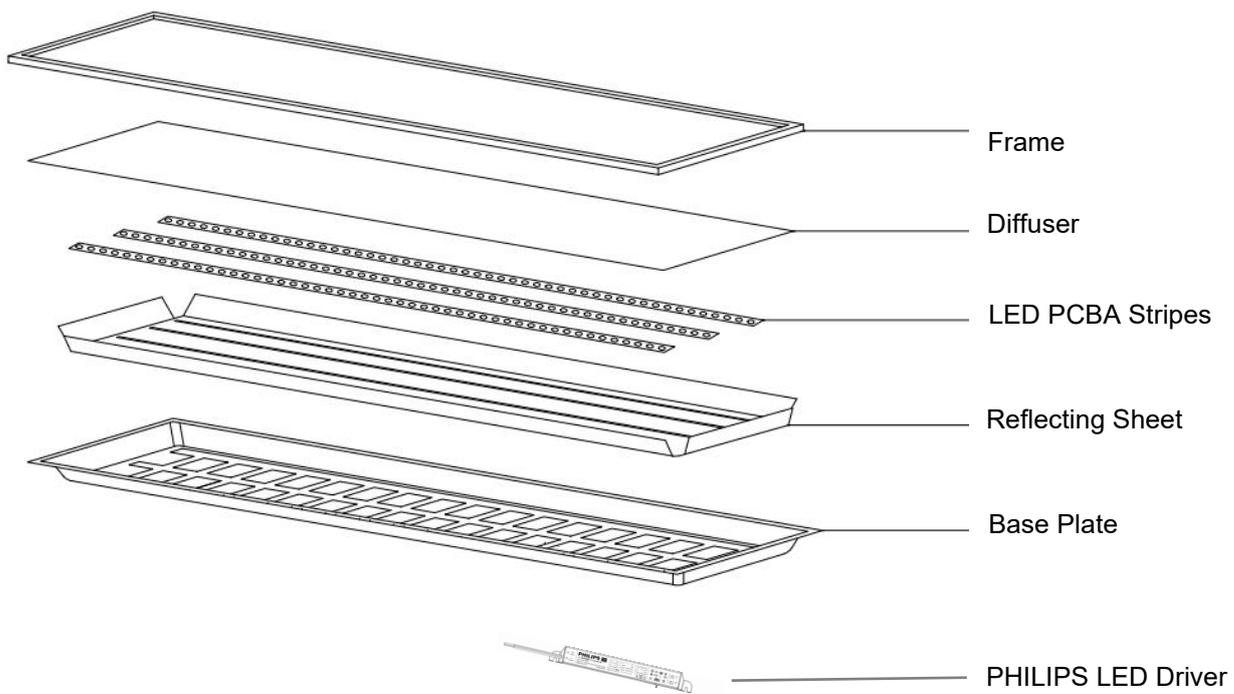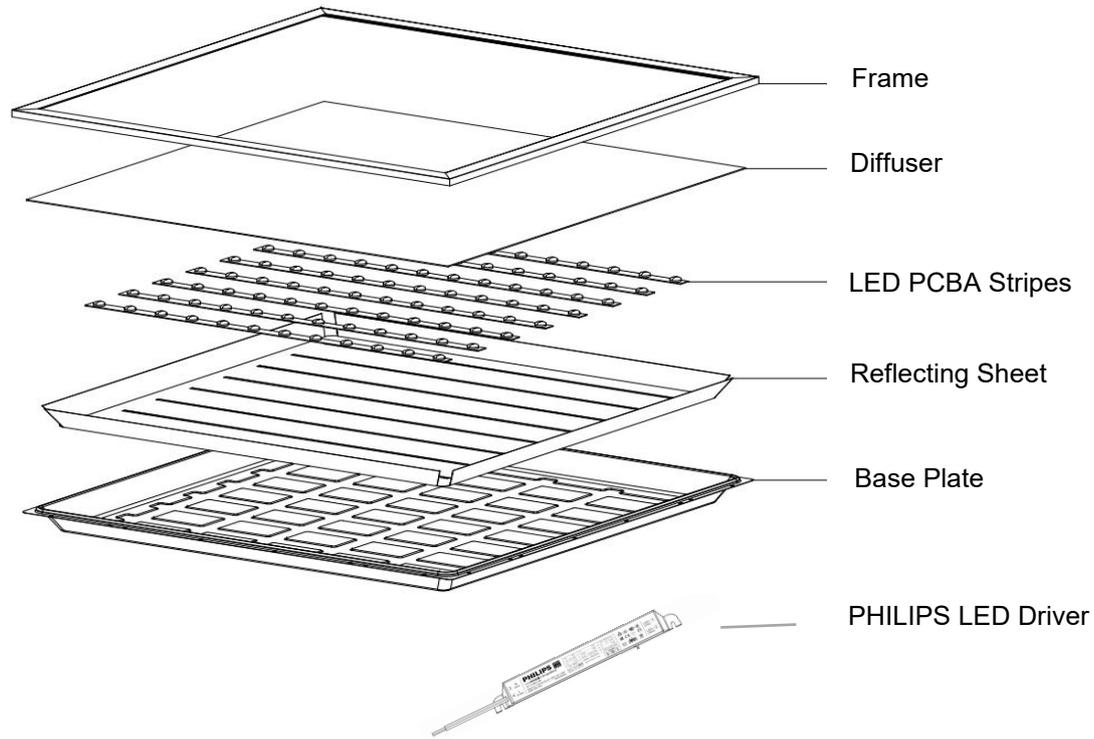


Installation Methods


INSTALLATION 1

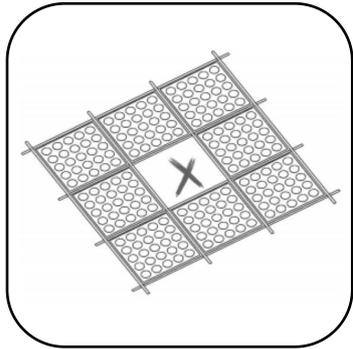


1.Remove The Ceiling Where Need To Install The Panel Light;

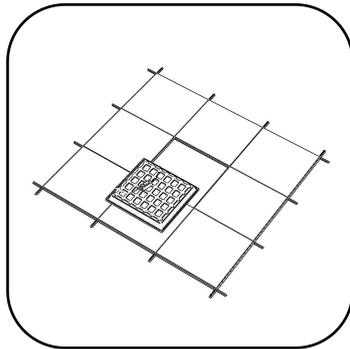

2.Connect The AC Input Wire of The Driver To The Electric Supply And Then Connect The Driver With The Connector of The Lamp;




3. Put The Remaining Part of The Driver Wire To The Corner Hole of The Panel To Avoid The Panel Falling;

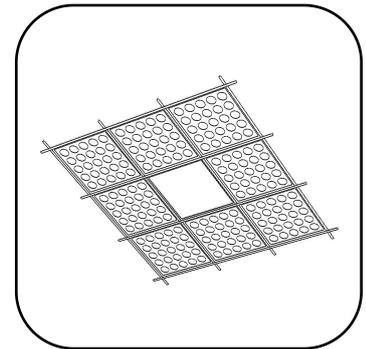


4.Put The Panel To The Ceiling Hole, The Installation Is Finished.


INSTALLATION 2




1. Fix The 4 Sockets To The Ceiling With Screws;

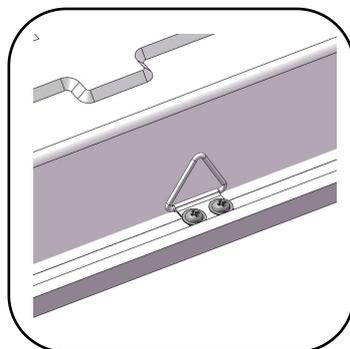

2. Unscrew The Existing Screws Then Fasten The Triangle Rings On The Panel With Them;




3. Fasten The Suspension Ropes To The Panel, Adjust The Length Of The Suspension Rope To The Desired Length;

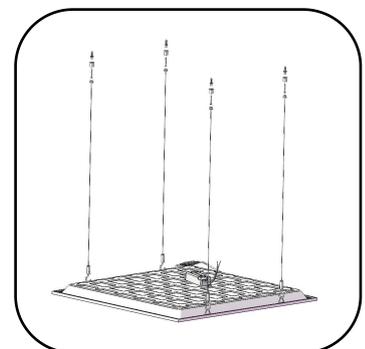


4. Fix The Panel To The Ceiling And Make Final Adjustments For Desired Height And Angle, Connect the Led Driver To Ac Mains Power, Installation Finished.


INSTALLATION 3

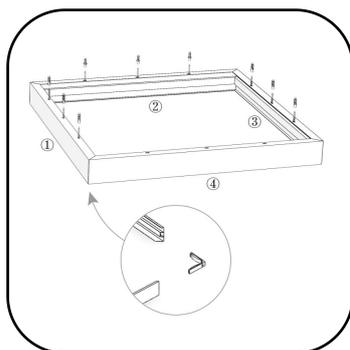


1. Assemble The Frame ①②③④, Mount The Frame ①②③ To The Ceiling With Screws;

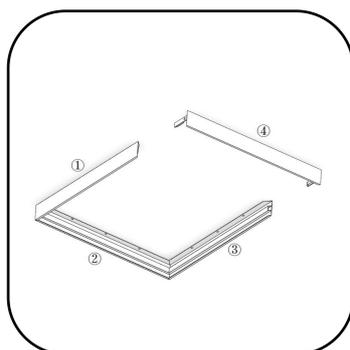

2. Take Off The Frame ④;

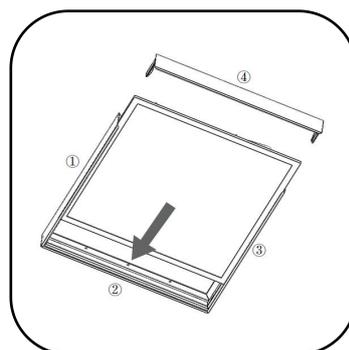


3. Connect The AC Input Wire Of The Driver To The Electric Supply And Then Connect The Driver With The Connector Of The Lamp, Slide In The Panel;

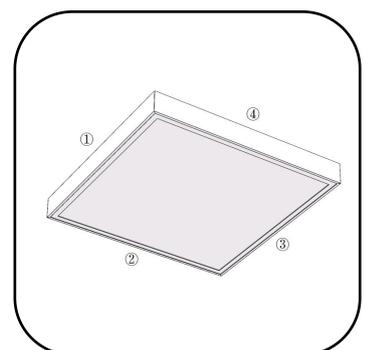


4. Cose The Frame 4 Again After Safety Test, Installation Finished.


INSTALLATION 4

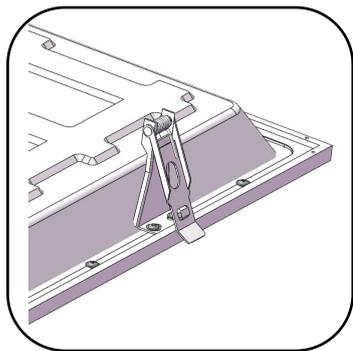


1. Unscrew the existing screws and nuts then fasten the 4 jump rings on the panel with them;

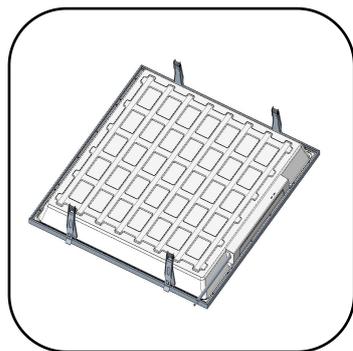

2. Connect the AC input wire of the driver to the Electric supply and then connect the driver With the connector of the lamp;

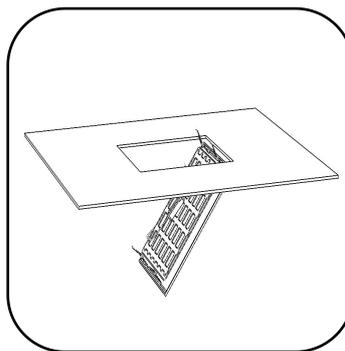

3. Insert the jump rings into the pre-opened hole;

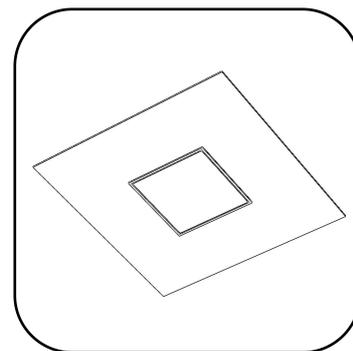

4. The installation is finished.




WARNING !

1. Please Make Sure To Turn Off The Power Before Starting The Installation.
2. The Light Source of This Lamp Is Not Replaceable, When The Light Source Reaches Its End Of Life The Whole Luminaire Should Be Replaced.
3. Making Installation Only By Certified Electrician

Packaging Diagram

Industrial Packaging

Model	Carton Box Size(mm)		Net weight(KG)/PC	G.W/1PC±0.2KG	PCS/Carton	PCS/20GP	PCS/40GP	PCS/40HQ
AU 301218-3K-U19 AU 301218-4K-U19	Outer Cartons	L1220*W300* H325	1.6	10.6	5	1856	3896	4480
AU 606018-4K AU 606018-3K-U19 AU 606018-4K-U19	Outer Cartons	L620*W300*H 625	1.6	10.6	5	1800	3720	4352
AU 626218-4K AU 626218-4K-U19	Outer Cartons	L645*W300*H 650	1.72	11.2	5	1800	3744	4416

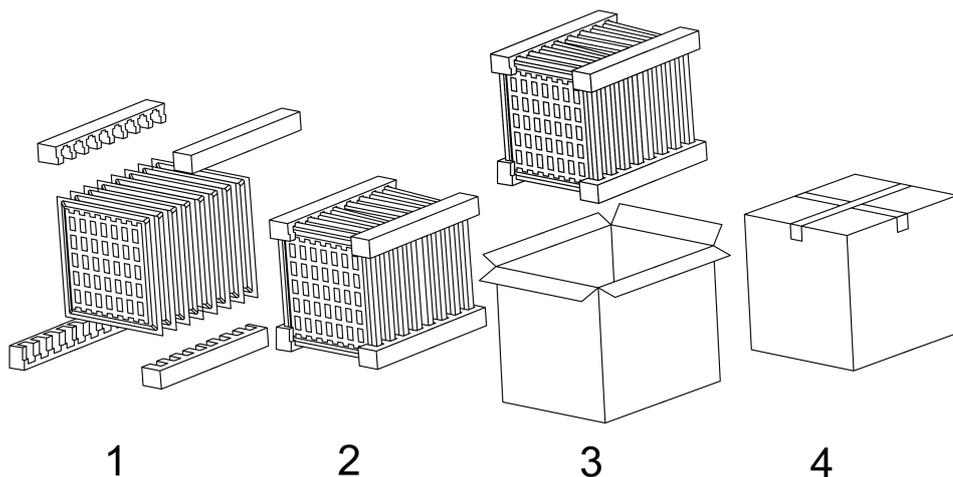

Packaging Diagram

Commercial Packaging

Model	Carton Box Size(mm)		Net weight(KG)/PC	G.W/1PC±0.2KG	PCS/Carton	PCS/20GP	PCS/40GP	PCS/40HQ
AU 301218-3K-U19 AU 301218-4K-U19	Outer Cartons	L1220*W220*H340	1.6	10.6	5	1750	3625	4065
AU 606018-4K AU 606018-3K-U19 AU 606018-4K-U19	Outer Cartons	L620*W220*H64	1.6	10.6	5	1800	3690	4200
AU 626218-4K AU 626218-4K-U19	Outer Cartons	L650*W230*H655	1.7	11.2	5	1620	3060	3720

