

CLEO Edge-lit LED Panel Light

CE RoHS CB  




Technical Data

Item No./Code	CL 301236-4K	933640	CL 301236-4K	933645	CL 606036-4K	913640	CL 606025-4K	912540	CL 626225-CCT	922550
	CL 301236-4K-U19	933641			CL 606036-4K-U19	912541	CL 606025-4K-U19	912541	CL 626225-4K	922540
Power(W)	36W		36W		36W		25W		25W	
Size	300*1200*10MM		300*1200*10MM		600*600*10MM		600*600*10MM		620*620*10MM	
Lighting Effect	120LM/W		150LM/W		120LM/W		150LM/W		150LM/W	
Carton(mm) 5pcs	L1295*W235*H345		L1295*W235*H345		L680*W200*H645		L680*W200*H645		L705*W200*H670	

Remarek:Common technical features for LED Panel



Voltage(v)	Drive mode	Power Factor(PF)	Color Rendering(RA)	Material	Design Lifespan	orking Temperature()
AC200-240V 50-60HZ	Switch constant current	0.92	82	AL+PMMA LGP	50000H	-25 ~ 45

PRODUCT SPECIFICATION

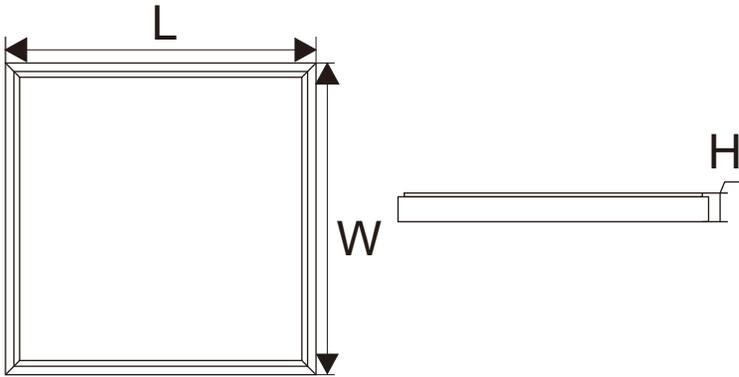

	PL3012	PL6060	PL6262
H	10MM		
W	300MM	600MM	620MM
L	1200MM	600MM	620MM

Light Distribution Diagram

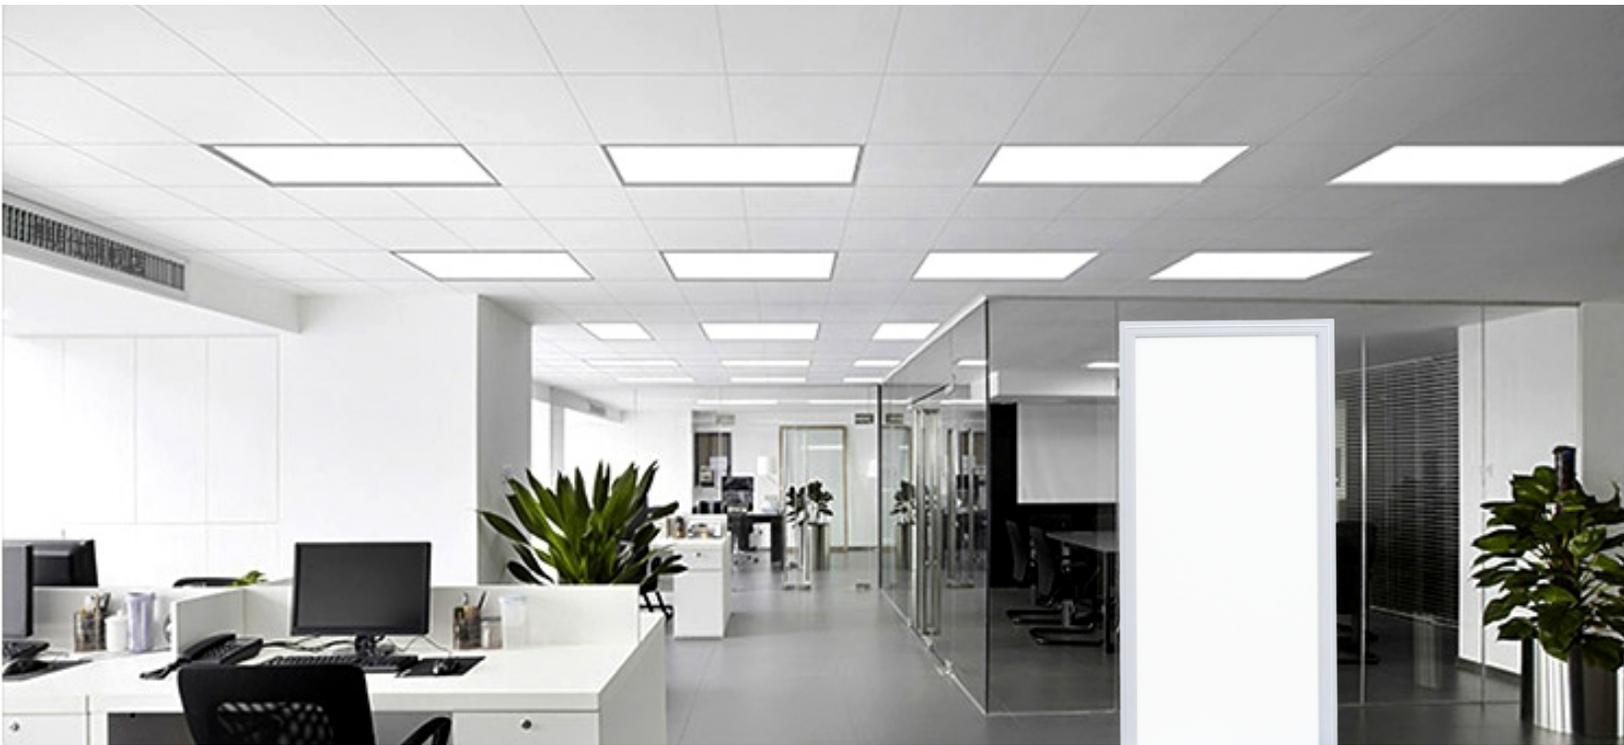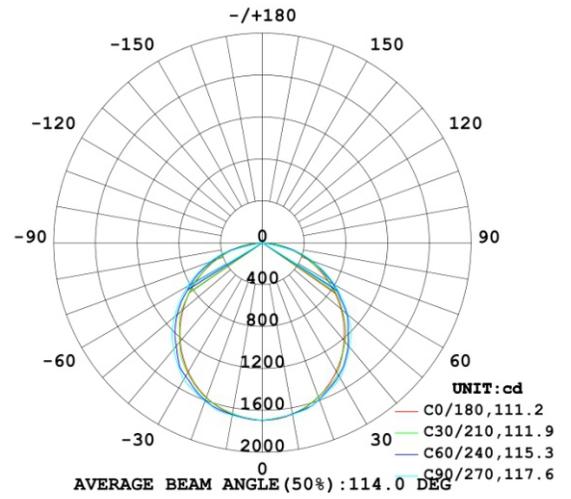

DALI Dimming



0/1-10V Dimming



Triac Dimming



PRODUCT SPECIFICATION

Installation way 1: Jump Ring

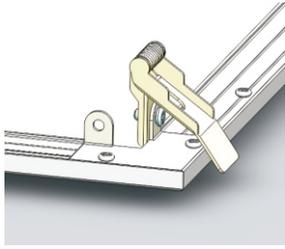


Image1

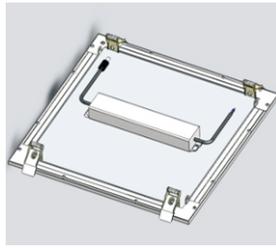


Image2

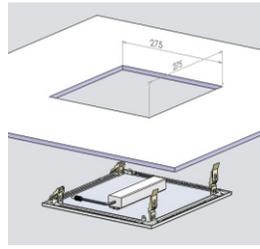


Image3

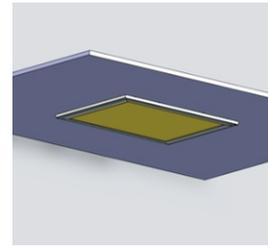


Image4

Step 1: Fasten 4 jump rings on the panel with screws and nuts;

Step 2: Connect the AC input wire of the driver to the electric supply and then connect the driver with the connector of the lamp;

Step 3: Insert the jump rings into the pre-opened hole;

Step 4: The installation is finished.

Installation way 2: Mounting




Image1

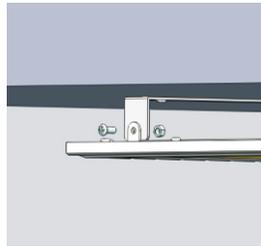


Image2

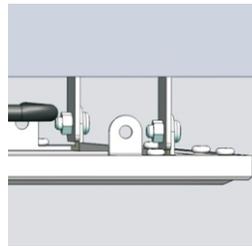


Image3

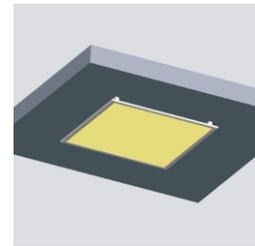


Image4

Step 1: Fix two ceiling angle irons on the ceiling with the expansion pipe and screws;

Step 2: Connect the AC input wire of the driver to the electric supply and then connect the driver with the connector of the lamp;

Step 3: Fix the lamp on the ceiling angle iron with screws and nuts;

Installation way 3: N-built

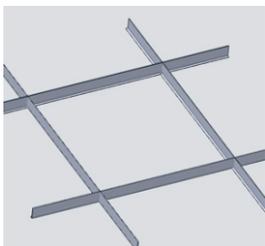


Image1

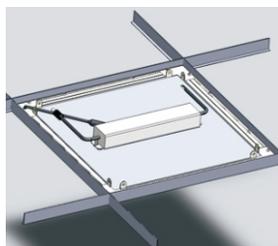


Image2




Image3

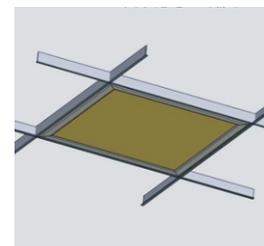


Image4

Step 1: Lay the frame flat;

Step 2: Place the lamp flat in the frame;

Step 3: Use the original fine wire of the ceiling to pass through the corner holes of the lamp to fix the lamp;

Step 4: Connect the AC input wire of the driver to the electric supply, and then the installation is finished.

PRODUCT SPECIFICATION


Installation way 4: Suspending

Image1



Image2



Image3

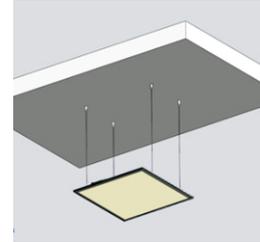


Image4

Step 1: Insert the steel wire rope into the corner hole of the lamp;

Step 2: Fix the 4 steel wire fasteners on the ceiling, thread the steel wire rope into them, and adjust the height;

Step 3: Install the underneath components;

Step 4: The installation is finished.


Installation way 5: Reverse buckling

Image1

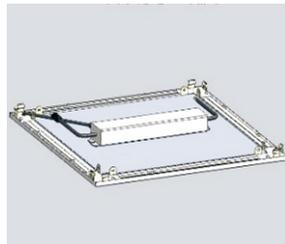


Image2

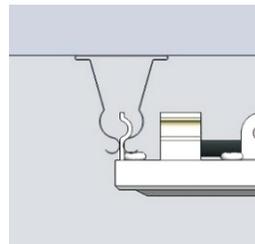


Image3




Image4

Step 1: This installation way must be equipped with a corner brace connection with a reverse function;

Step 2: Connect the AC input wire of the driver to the electric supply;

Step 3: Insert the curved part of the lamp into the keel;

Step 4: The installation is finished.