


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 159.18 lm/W			
MODEL		I _{max} (cd)	2901	S/MH(C0/180)	1.31
NOMINAL POWER(W)	42	LOR(%)	100.0	S/MH(C90/270)	1.23
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	6719.9	η UP,DN(C0-180)	0.7,50.2
NOMINAL FLUX(lm)	6719.85	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.7,48.4
LAMPS INSIDE	1	η up (%)	1.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	230	η down (%)	98.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

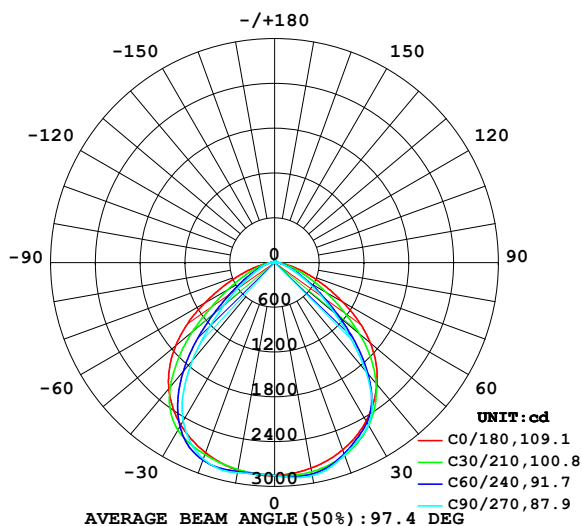

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

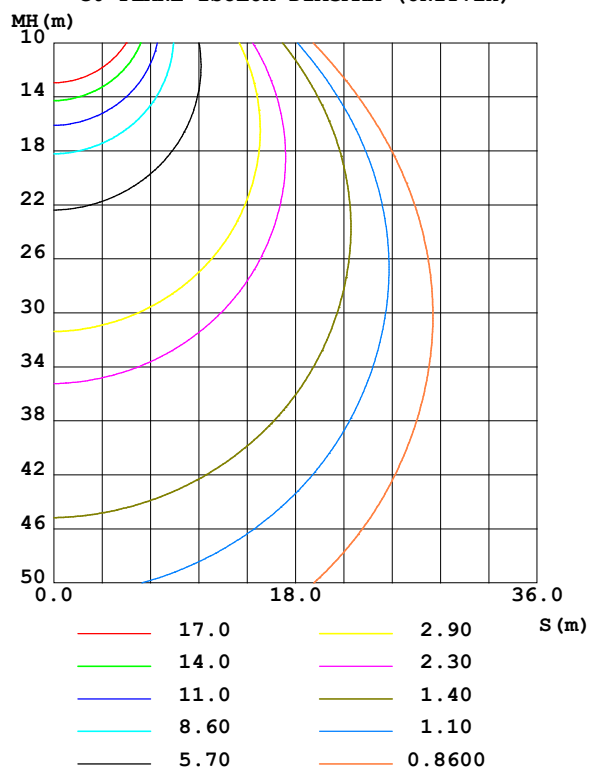

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2798	2861	2898	2883	2826	2830	2858	2817	0- 10	272.2	272.2	4.05,4.05
20	2669	2735	2743	2788	2709	2776	2798	2753	10- 20	795.4	1068	15.9,15.9
30	2453	2497	2512	2561	2514	2564	2451	2513	20- 30	1222	2290	34.1,34.1
40	2133	2033	1901	2121	2206	2040	1717	1967	30- 40	1437	3727	55.5,55.5
50	1676	1308	1050	1393	1730	1249	884.2	1189	40- 50	1284	5011	74.6,74.6
60	1052	669.7	495.5	720.5	1082	604.5	397.2	576.7	50- 60	864.9	5876	87.4,87.4
70	499.4	293.4	219.7	315.1	505.7	269.9	198.2	259.8	60- 70	469.1	6345	94.4,94.4
80	162.4	105.4	87.55	113.6	162.6	114.2	104.9	108.5	70- 80	212.6	6558	97.6,97.6
90	2.570	20.99	26.49	20.98	2.684	24.03	34.62	22.98	80- 90	68.56	6626	98.6,98.6
100	3.839	17.04	29.30	17.02	4.455	16.52	28.02	16.68	90-100	21.78	6648	98.9,98.9
110	5.949	10.23	13.40	10.11	6.837	11.51	14.84	12.65	100-110	14.41	6662	99.1,99.1
120	8.213	12.29	12.87	12.15	9.322	13.11	15.62	13.62	110-120	11.48	6674	99.3,99.3
130	10.24	13.11	16.89	12.91	11.67	14.18	17.34	14.20	120-130	11.90	6686	99.5,99.5
140	12.22	13.45	16.30	12.93	13.92	14.54	16.83	14.57	130-140	10.80	6697	99.7,99.7
150	14.31	14.66	15.30	14.06	15.57	15.43	16.35	15.93	140-150	9.122	6706	99.8,99.8
160	16.57	16.40	16.42	16.00	17.32	17.14	17.61	17.34	150-160	7.351	6713	99.9,99.9
170	18.51	18.19	17.96	18.11	18.75	18.69	18.83	18.82	160-170	4.985	6718	100,100
180	19.75	19.46	19.41	19.48	19.75	19.46	19.40	19.49	170-180	1.806	6720	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 4411.3 lm

%lum = 65.6%

%lamp = 65.6%

Conical surface Flux(130deg): 6151.5 lm

%lum = 91.5%

%lamp = 91.5%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz

Lamp Flux:6719.85x1 lm

NAME:

TYPE:

WEIGHT:

SPEC.: 4000K

DIM.:

SERIAL No.:


MFR.:

SUR.:

Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

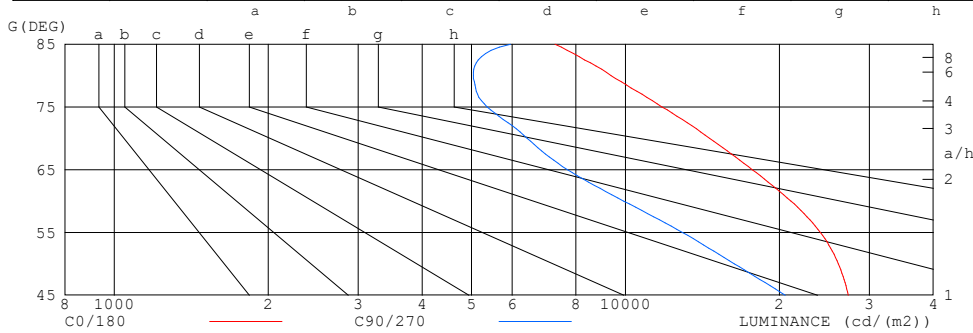

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7277	5960
80	9364	5041
75	11789	5363
70	14617	6423
65	17699	7696
60	21060	9910
55	24071	12929
50	26100	16330
45	27275	20520


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

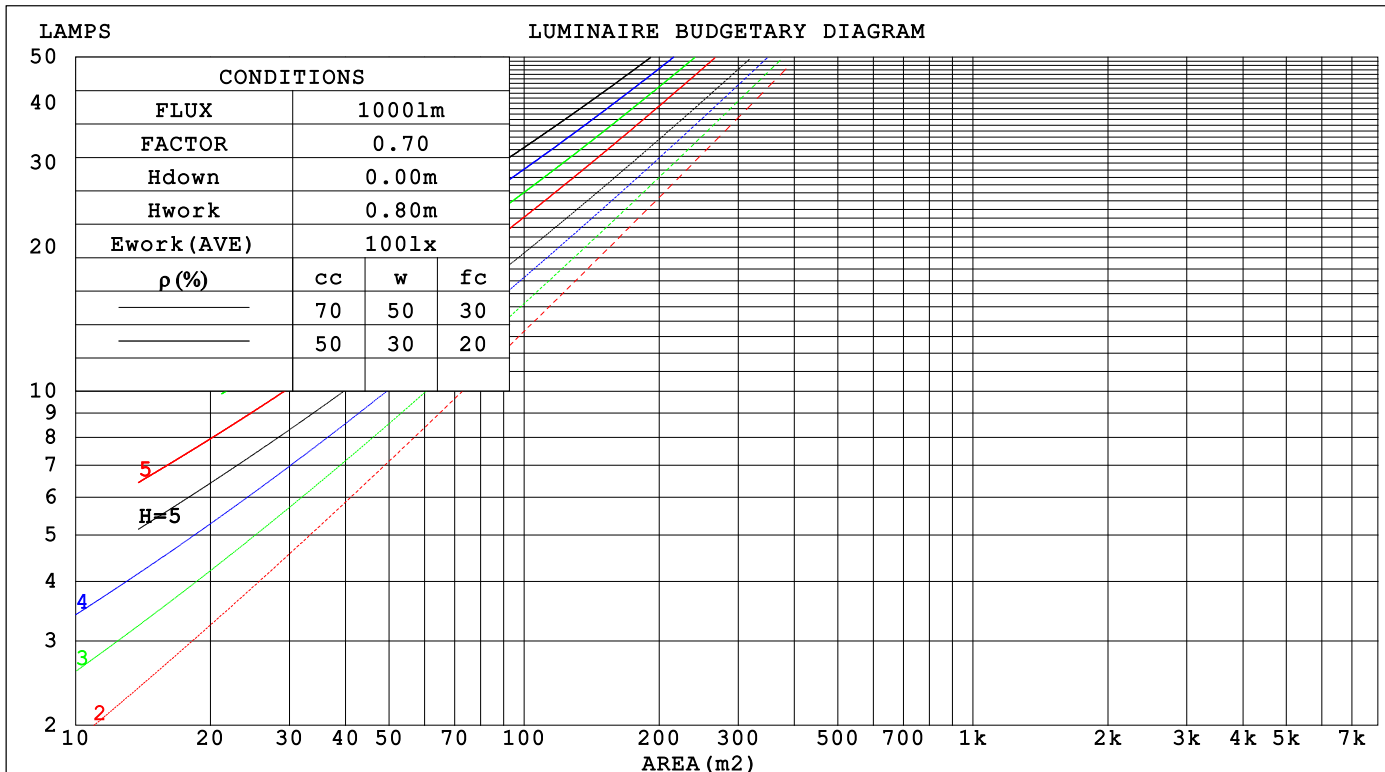

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.263	.149	.047	.255	.146	.046	.241	.139	.044	.229	.132	.042	.217	.126	.041		
2.0	.252	.138	.042	.245	.135	.042	.233	.130	.040	.222	.125	.039	.212	.120	.038		
3.0	.237	.126	.038	.231	.124	.037	.221	.120	.036	.211	.116	.035	.202	.112	.035		
4.0	.222	.115	.034	.217	.114	.034	.208	.110	.033	.199	.107	.032	.191	.104	.032		
5.0	.208	.106	.031	.204	.105	.030	.195	.102	.030	.188	.099	.029	.180	.096	.029		
6.0	.195	.098	.028	.191	.097	.028	.184	.094	.027	.177	.092	.027	.170	.090	.027		
7.0	.183	.091	.026	.180	.090	.026	.173	.088	.025	.167	.086	.025	.161	.084	.025		
8.0	.173	.084	.024	.170	.084	.024	.164	.082	.023	.158	.080	.023	.153	.078	.023		
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.021	.145	.074	.021		
10.0	.154	.074	.021	.152	.073	.020	.147	.072	.020	.142	.071	.020	.138	.069	.020		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022		
1.0	.188	.167	.149	.161	.144	.128	.110	.099	.089	.063	.057	.052	.020	.018	.017		
2.0	.178	.143	.114	.152	.123	.098	.104	.085	.069	.060	.050	.040	.019	.016	.013		
3.0	.169	.125	.090	.145	.108	.078	.099	.075	.055	.057	.044	.032	.018	.014	.011		
4.0	.161	.111	.073	.138	.096	.064	.095	.067	.045	.055	.039	.026	.018	.013	.009		
5.0	.154	.101	.061	.132	.087	.053	.091	.061	.038	.053	.036	.022	.017	.012	.007		
6.0	.147	.092	.053	.126	.080	.046	.087	.056	.032	.051	.033	.019	.016	.011	.006		
7.0	.141	.085	.046	.121	.074	.040	.084	.052	.029	.049	.030	.017	.016	.010	.006		
8.0	.135	.079	.041	.116	.069	.036	.080	.048	.026	.047	.029	.015	.015	.009	.005		
9.0	.129	.074	.038	.111	.065	.033	.077	.045	.023	.045	.027	.014	.015	.009	.005		
10.0	.124	.070	.034	.107	.061	.030	.074	.043	.021	.043	.025	.013	.014	.008	.004		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.: 4000K			DIM.:			SERIAL No.:				
MFR.:			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.8	18.2	17.1	18.4	18.6	14.4	15.8	14.7	16.0	16.2
3H	17.7	18.9	18.0	19.2	19.4	14.8	16.0	15.1	16.3	16.5
4H	18.0	19.1	18.3	19.4	19.7	14.9	16.1	15.2	16.3	16.6
6H	18.1	19.2	18.5	19.5	19.8	15.0	16.1	15.3	16.4	16.7
8H	18.2	19.2	18.5	19.5	19.8	15.0	16.1	15.4	16.4	16.7
12H	18.2	19.2	18.5	19.5	19.8	15.0	16.1	15.4	16.4	16.7
4H 2H	16.9	18.0	17.2	18.3	18.6	14.8	16.0	15.2	16.3	16.5
3H	17.9	18.9	18.2	19.2	19.5	15.3	16.3	15.7	16.6	16.9
4H	18.2	19.2	18.6	19.5	19.9	15.5	16.4	15.9	16.7	17.1
6H	18.5	19.3	18.9	19.7	20.1	15.6	16.4	16.0	16.8	17.2
8H	18.6	19.3	19.0	19.7	20.1	15.7	16.4	16.1	16.8	17.2
12H	18.6	19.3	19.1	19.7	20.1	15.8	16.5	16.2	16.9	17.3
8H 4H	18.2	19.0	18.6	19.4	19.8	15.6	16.4	16.0	16.7	17.2
6H	18.5	19.2	19.0	19.6	20.0	15.8	16.5	16.3	16.9	17.3
8H	18.7	19.2	19.1	19.7	20.1	16.0	16.5	16.4	17.0	17.4
12H	18.8	19.2	19.3	19.7	20.2	16.1	16.6	16.6	17.0	17.5
12H 4H	18.2	18.9	18.6	19.3	19.7	15.6	16.3	16.0	16.7	17.1
6H	18.5	19.1	19.0	19.5	20.0	15.9	16.4	16.4	16.9	17.3
8H	18.7	19.1	19.2	19.6	20.1	16.0	16.5	16.5	17.0	17.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.3					+ 0.7 / - 1.0				
1.5H	+ 0.3 / - 0.4					+ 0.3 / - 0.6				
2.0H	+ 1.0 / - 1.2					+ 1.4 / - 1.4				

CIE Pub.117, 6720 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 6.6)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	64	53	47	63	53	47	62	52	46	41
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	72	66	81	72	66	78	72	65	59
1.25	88	79	73	87	79	73	84	77	72	66
1.50	93	85	79	91	84	78	88	82	77	70
2.00	99	92	86	97	90	85	94	88	84	77
2.50	102	96	90	100	94	89	96	91	87	80
3.00	105	99	94	103	98	93	99	94	91	83
4.00	108	103	99	106	102	98	102	98	95	86
5.00	110	106	103	108	104	101	103	100	98	89
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

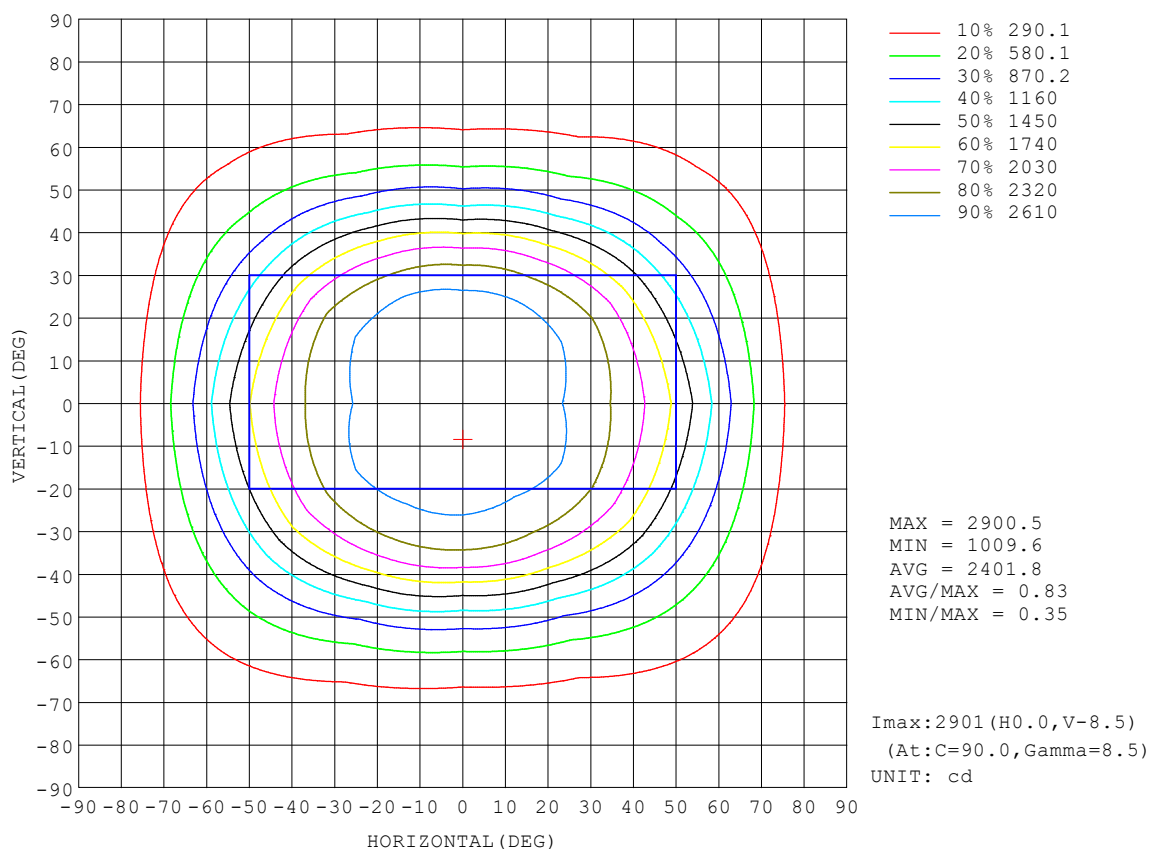


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

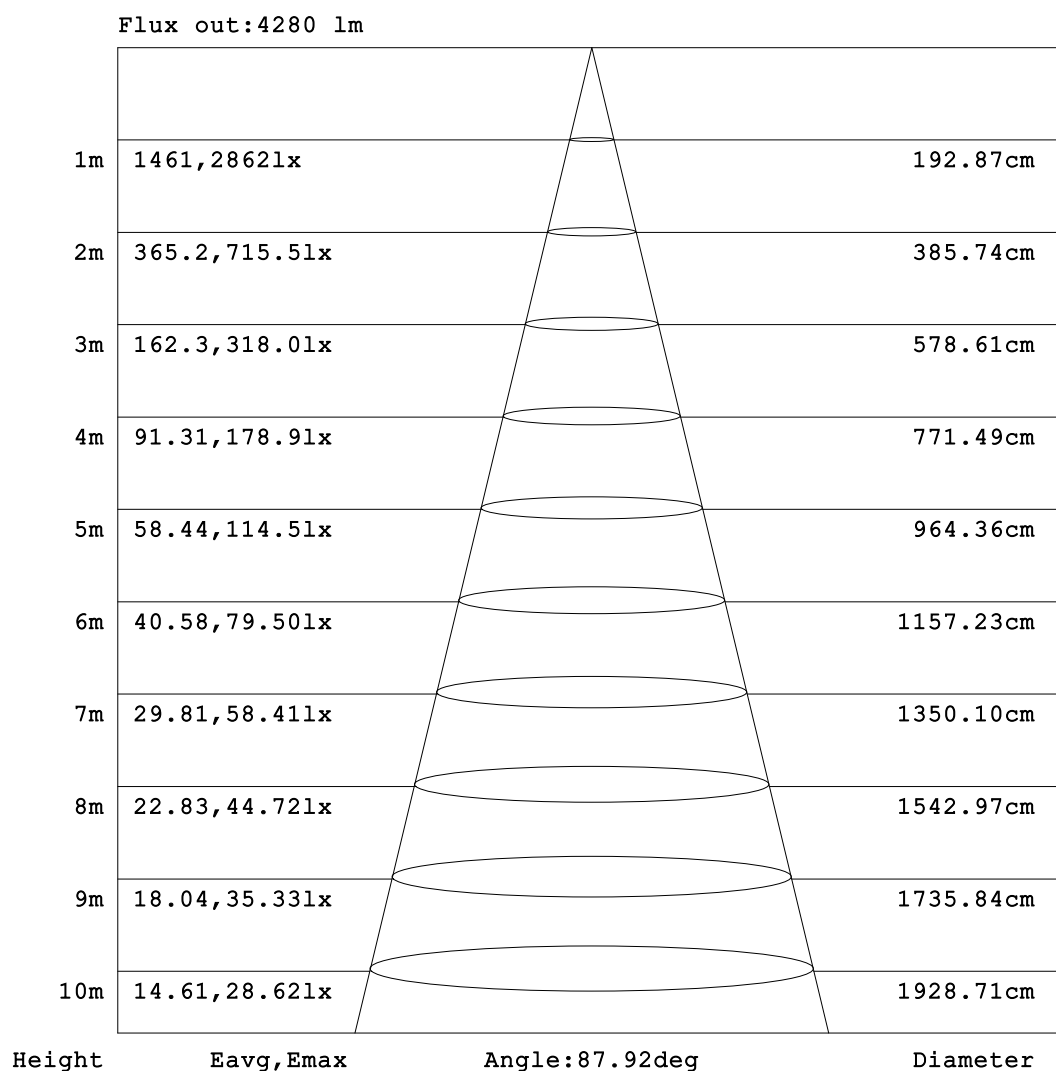


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

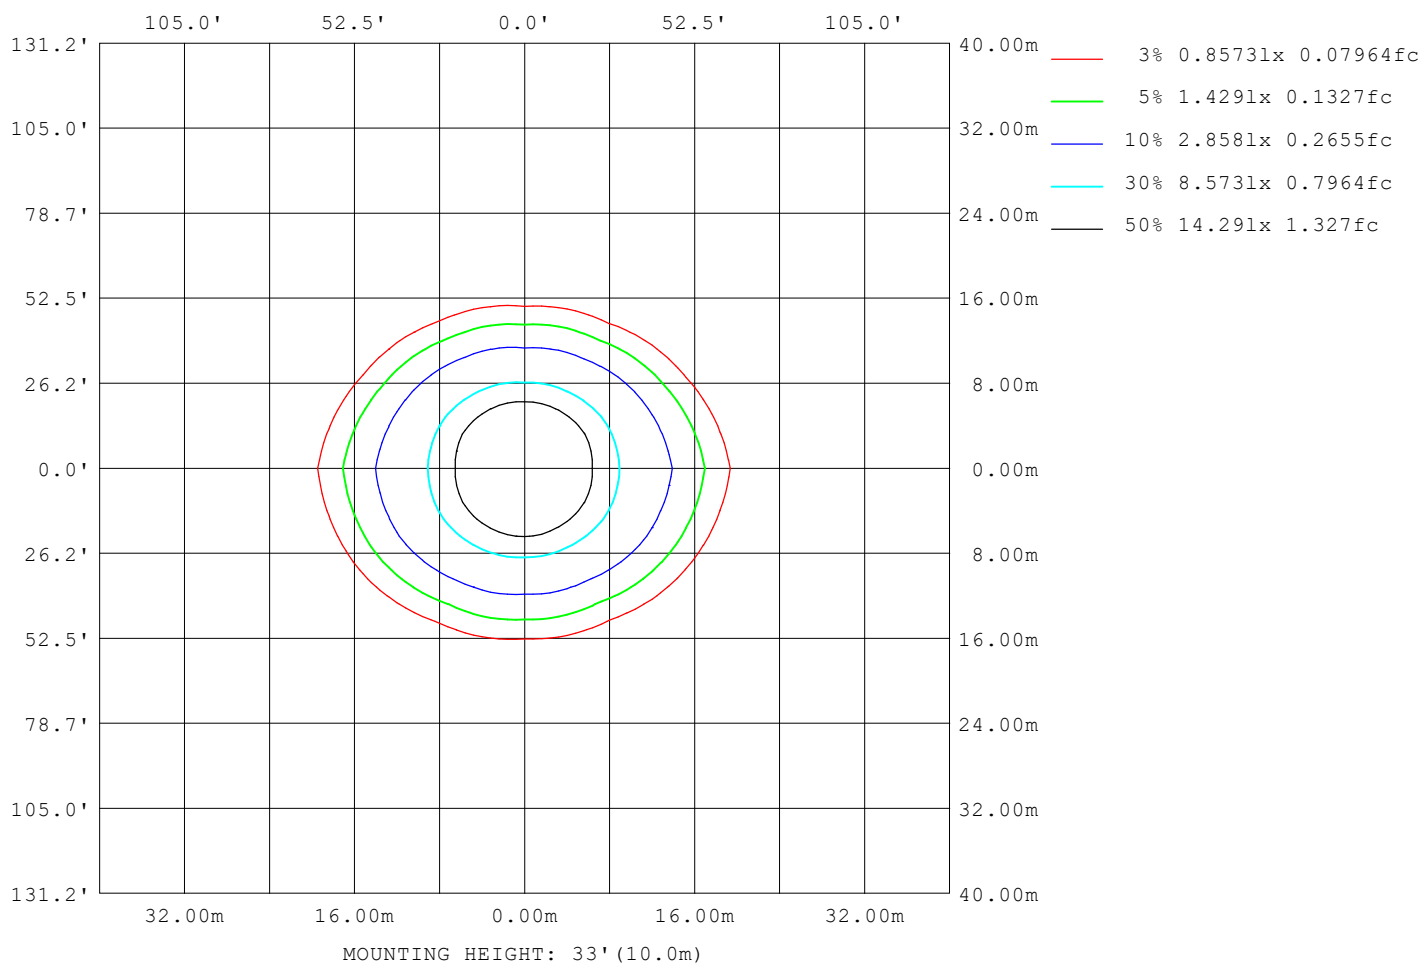

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17836
L_0~180 (75) av	11841
L_0~180 (85) av	7087
L_90~270 (65) av	7048
L_90~270 (75) av	5533
L_90~270 (85) av	6912
L_45 (65) av	10017
L_45 (75) av	6824
L_45 (85) av	6890

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks:

Planar Illuminance Curve

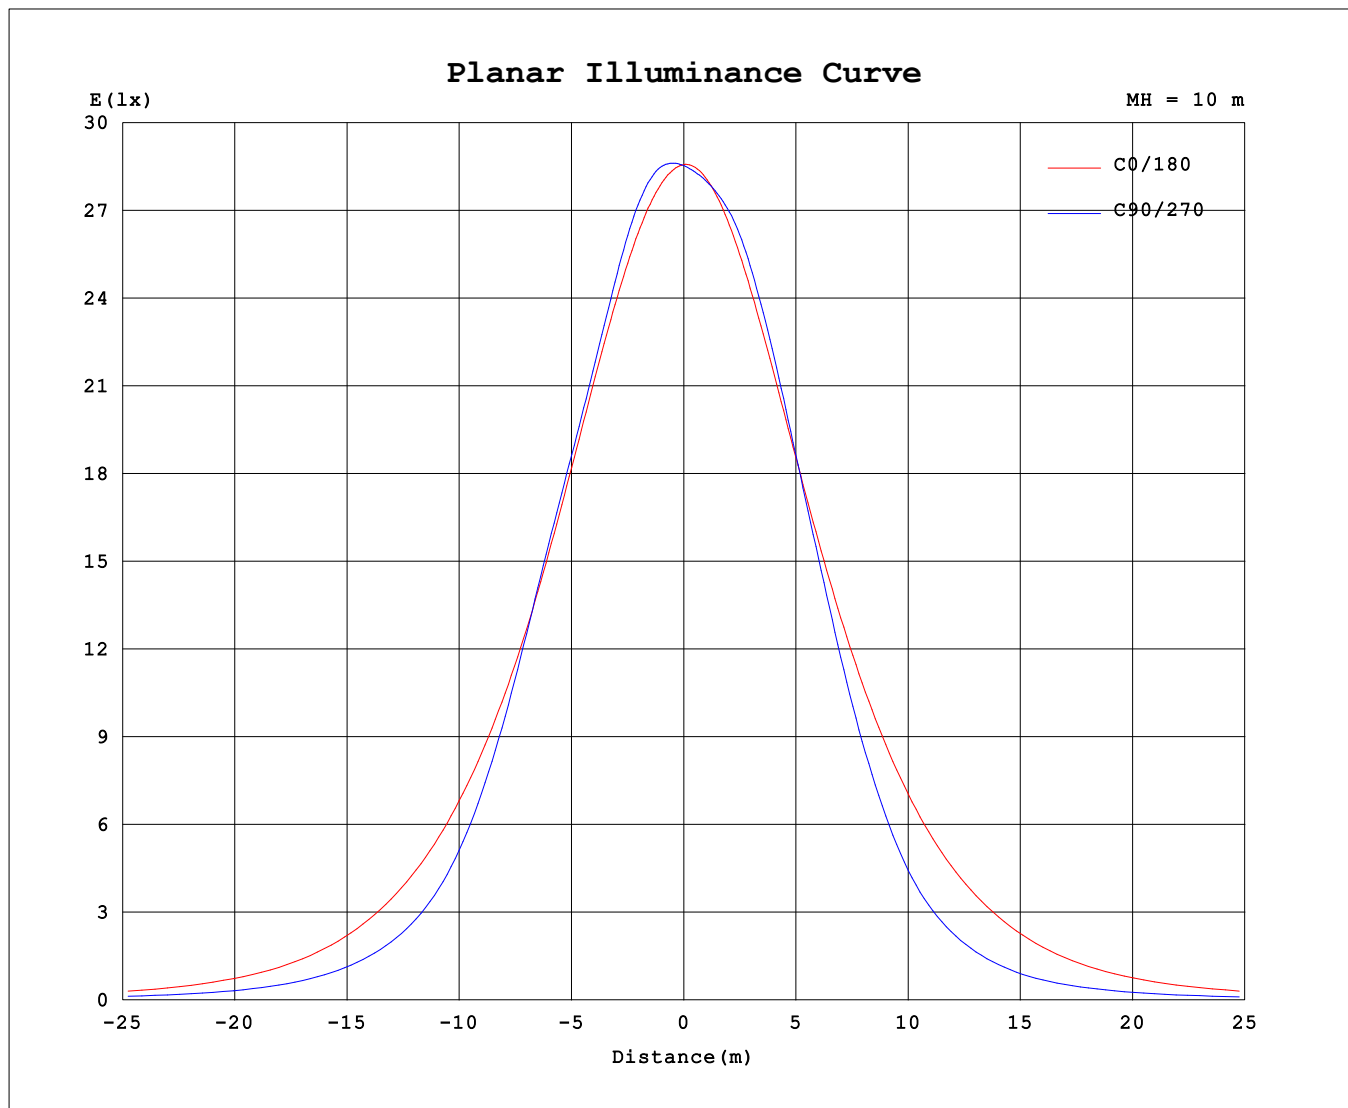

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: QC
Test Date: 2025-04-07

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 8.120m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.85V I:0.1872A P:42.217W PF:0.9767 Freq:49.99Hz Lamp Flux:6719.85x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 4000K	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2854	2854	2854	2854	2854	2854	2854	2854	2854	2854	2854	2854						
5	2834	2857	2879	2888	2885	2869	2851	2839	2839	2842	2835	2829						
10	2798	2847	2875	2898	2899	2867	2826	2816	2843	2858	2834	2800						
15	2743	2810	2827	2847	2867	2847	2778	2782	2850	2863	2833	2766						
20	2669	2744	2726	2743	2779	2796	2709	2736	2816	2798	2784	2722						
25	2574	2650	2605	2635	2659	2714	2622	2680	2720	2664	2677	2654						
30	2453	2520	2474	2512	2527	2595	2514	2591	2537	2451	2484	2541						
35	2306	2345	2269	2280	2340	2429	2376	2434	2263	2134	2206	2361						
40	2133	2117	1948	1901	2031	2210	2206	2174	1905	1717	1840	2094						
45	1927	1831	1546	1451	1631	1932	1992	1824	1487	1257	1420	1753						
50	1676	1482	1135	1050	1205	1582	1730	1438	1061	884	1005	1374						
55	1379	1115	792	742	846	1195	1423	1033	723	597	681	995						
60	1052	798	541	496	581	860	1082	721	488	397	457	696						
65	747	550	355	325	385	590	760	493	321	270	305	479						
70	499	360	227	220	246	384	506	326	214	198	205	315						
75	305	222	147	139	157	237	308	205	148	148	143	197						
80	162	121	89.5	87.5	96.2	131	163	121	107	105	101	116						
85	63.4	56.6	49.2	51.9	53.1	58.8	60.2	63.5	72.5	68.5	65.7	61.8						
90	2.57	18.6	23.4	26.5	24.0	18.0	2.68	17.2	30.9	34.6	28.9	17.0						
95	2.99	18.8	26.2	42.0	28.7	17.5	3.43	16.5	25.8	29.9	25.3	16.3						
100	3.84	9.63	24.5	29.3	25.1	8.91	4.46	10.1	22.9	28.0	22.6	10.8						
105	4.85	7.75	15.9	21.1	16.0	7.65	5.59	9.39	19.8	23.9	19.7	10.0						
110	5.95	9.65	10.8	13.4	10.7	9.49	6.84	11.4	11.6	14.8	13.4	11.9						
115	7.12	10.2	10.7	15.6	10.7	9.96	8.09	11.7	12.3	17.5	12.9	12.0						
120	8.21	10.3	14.3	12.9	14.3	9.96	9.32	10.7	15.5	15.6	15.9	11.3						
125	9.19	10.5	14.9	16.0	14.8	10.2	10.5	11.7	15.9	17.5	16.1	12.0						
130	10.2	11.0	15.2	16.9	15.3	10.6	11.7	12.3	16.0	17.3	15.7	12.7						
135	11.3	12.0	15.1	16.8	14.9	11.5	12.8	13.2	14.6	16.3	14.6	13.6						
140	12.2	12.7	14.2	16.3	13.9	12.0	13.9	14.1	15.0	16.8	14.9	14.3						
145	13.2	13.5	14.3	14.9	13.9	13.0	14.7	14.5	15.0	15.8	15.4	15.1						
150	14.3	14.4	14.9	15.3	14.3	13.8	15.6	15.3	15.6	16.4	16.0	15.8						
155	15.4	15.4	15.6	15.8	14.8	15.0	16.4	16.4	15.9	17.0	16.6	16.6						
160	16.6	16.4	16.4	16.4	15.7	16.3	17.3	17.3	16.9	17.6	17.3	17.4						
165	17.6	17.3	17.3	17.2	16.8	17.5	18.2	18.0	17.9	18.3	18.1	18.1						
170	18.5	18.3	18.1	18.0	17.8	18.4	18.7	18.7	18.7	18.8	18.9	18.7						
175	19.3	19.1	18.9	18.7	18.7	19.2	19.4	19.4	19.2	19.3	19.4	19.5						
180	19.7	19.6	19.3	19.4	19.3	19.6	19.7	19.6	19.3	19.4	19.3	19.7						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:QC
Test Date:2025-04-07

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:8.120m [K=1.0000]
Remarks: