






NEVA

LED Linear Trunking System


NEVA Trunking has a continuous power supply. Optionally 5-pole – matched to the respective application, for four circuits, DALI and emergency light or other additional functions. The gear trays can be freely positioned and make absolutely reliable electrical contact. The feed-in is flexible without visible interference points or collisions.

Model No.	Size(A*B*Cmm)	Power (W)	Flux(lm)	Efficiency (lm/w)	Voltage(V)	PF	IP	CRI	Beam Angel	Energy Class	Code
NV12-42A3K3W	1198*66*66	42	6720/ 8400	160/200	220-240	0.9	IP20	80	90°	D/B	112142
NV15-50A3K3W	1498*66*66	50	8000/ 10000	160/200	220-240	0.9	IP20	80	90°	D/B	113150
NV15-75A3K3W	1496*66*66	75	12000/ 15000	160/200	220-240	0.9	IP20	80	90°	D/B	113175
NV12-42B3K3W	1198*66*66	42	6720/ 8400	160/200	220-240	0.9	IP20	80	90°	D/B	112242
NV15-50B3K3W	1498*66*66	50	8000/ 10000	160/200	220-240	0.9	IP20	80	90°	D/B	112350
NV15-75B3K3W	1496*66*66	75	12000/ 15000	160/200	220-240	0.9	IP20	80	90°	D/B	112375
NV12-42C3K3W	1198*66*66	42	6720/ 8400	160/200	220-240	0.9	IP20	80	90°	D/B	112342
NV15-50C3K3W	1498*66*66	50	8000/ 10000	160/200	220-240	0.9	IP20	80	90°	D/B	113350
NV15-75C3K3W	1496*66*66	75	12000/ 15000	160/200	220-240	0.9	IP20	80	90°	D/B	113375

Size

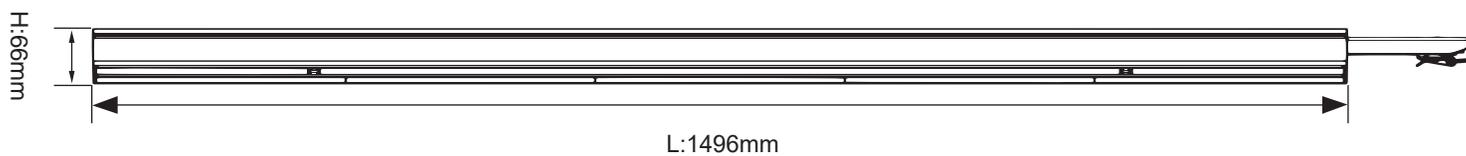


LUMOLUX

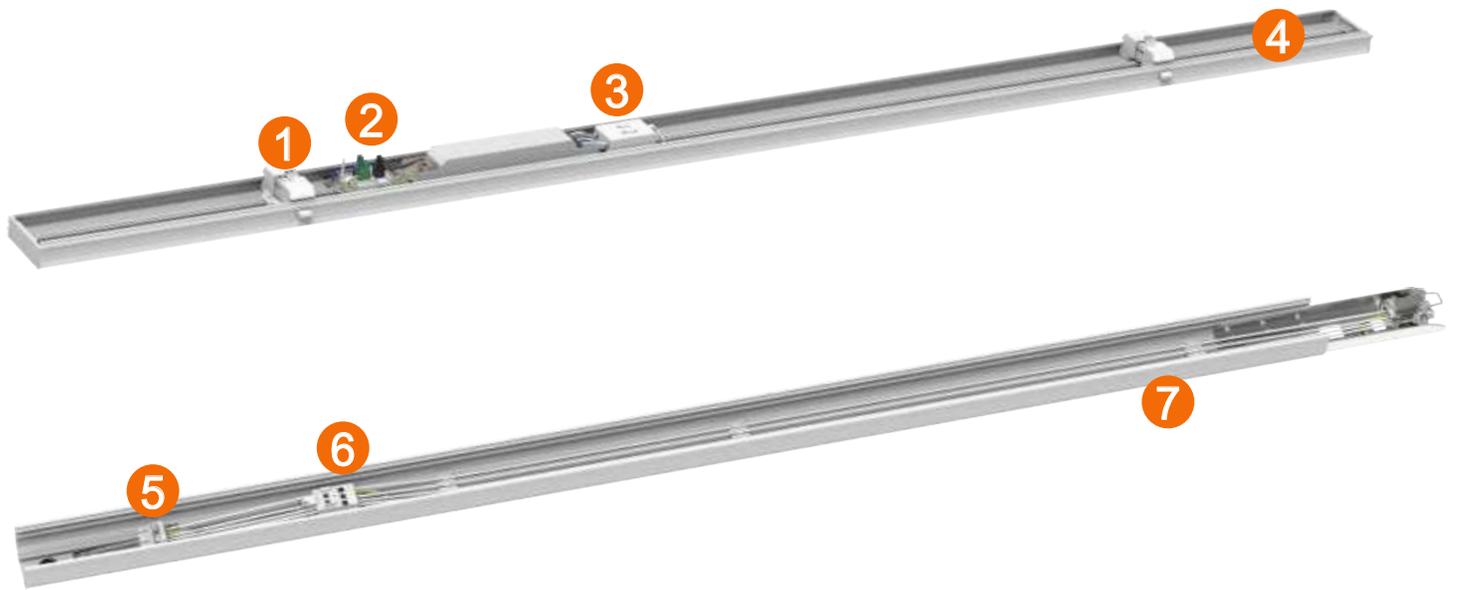

- ① Lock holder
- ② 3-phase adjustable L1/L2/L3
- ③ CCT changeable
- ④ Flexible optics combination
- ⑤ Connecting plate
- ⑥ Five wiring available
- ⑦ Aluminum housing color white or black

Five wiring available

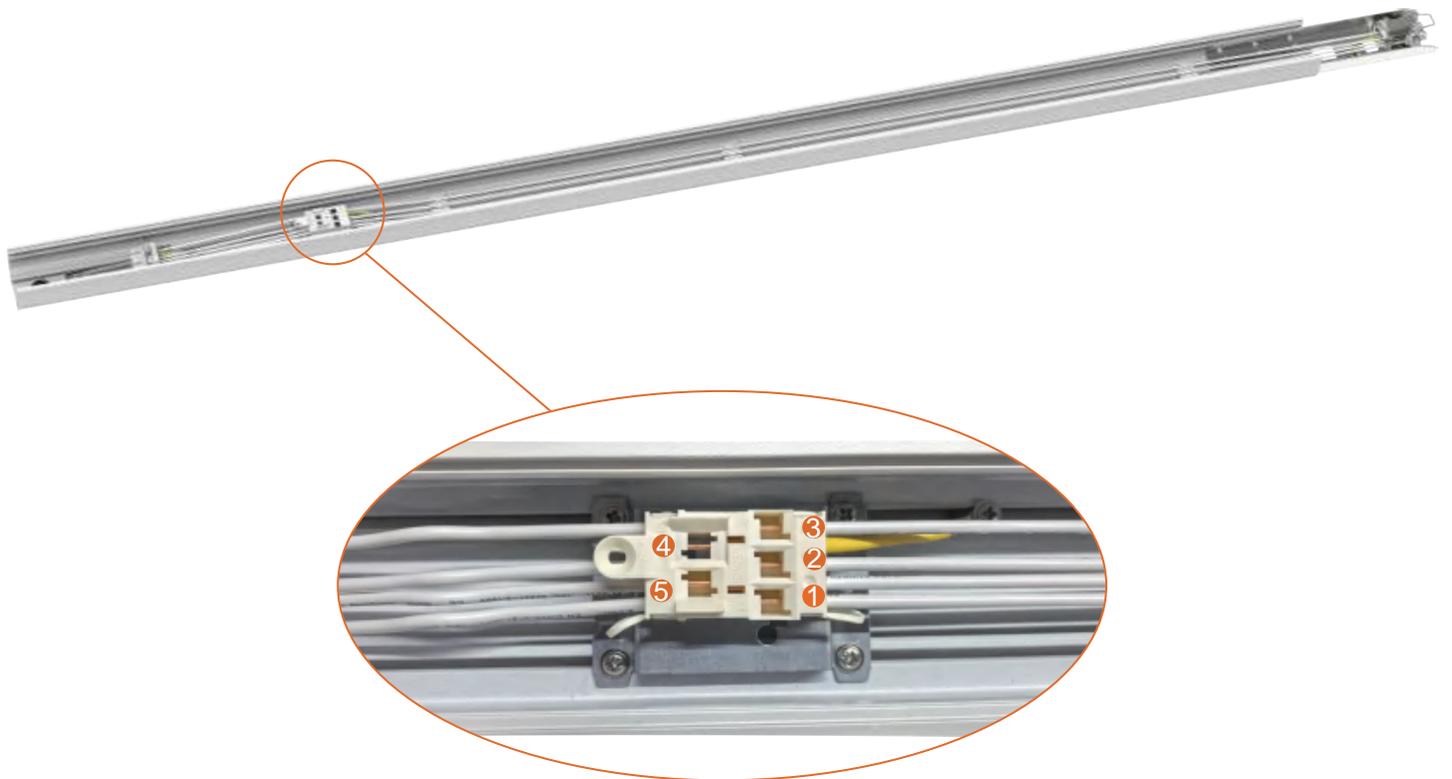


Power cable diameter: 2.5mm²

- ① L1 phase
- ② L2 phase
- ③ L3 phase
- ④ PE
- ⑤ N

LUMOLUX

EMERGENCY LIGHTING

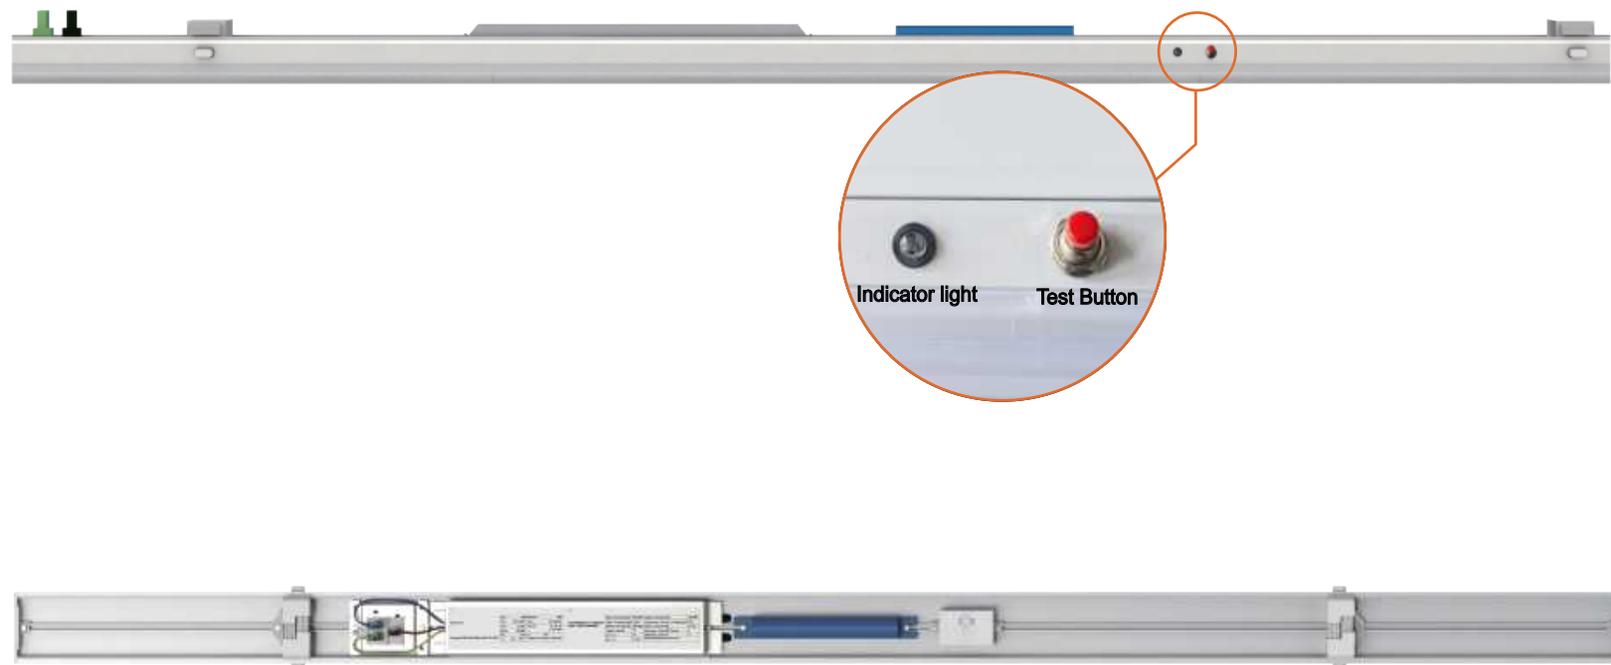


L/N	L-CHR/N-CHR	Battery	Emergency driver power	Power when in emergency	Duration time
OFF	ON	/	/	/	0%
OFF	OFF	3.6Ah	5W	5W	3hours

Internal emergency with built-in battery pack

When CHR detects that there is power, luminaires are on 100%. When there is no power detected, luminaires will work according to the selected emergency driver.


Various optics SA90°(UGR<19)

Lens Module




V

Central.Line.Optic




B

Individual.Lens.Optic



C


Triple.Lens.Optic

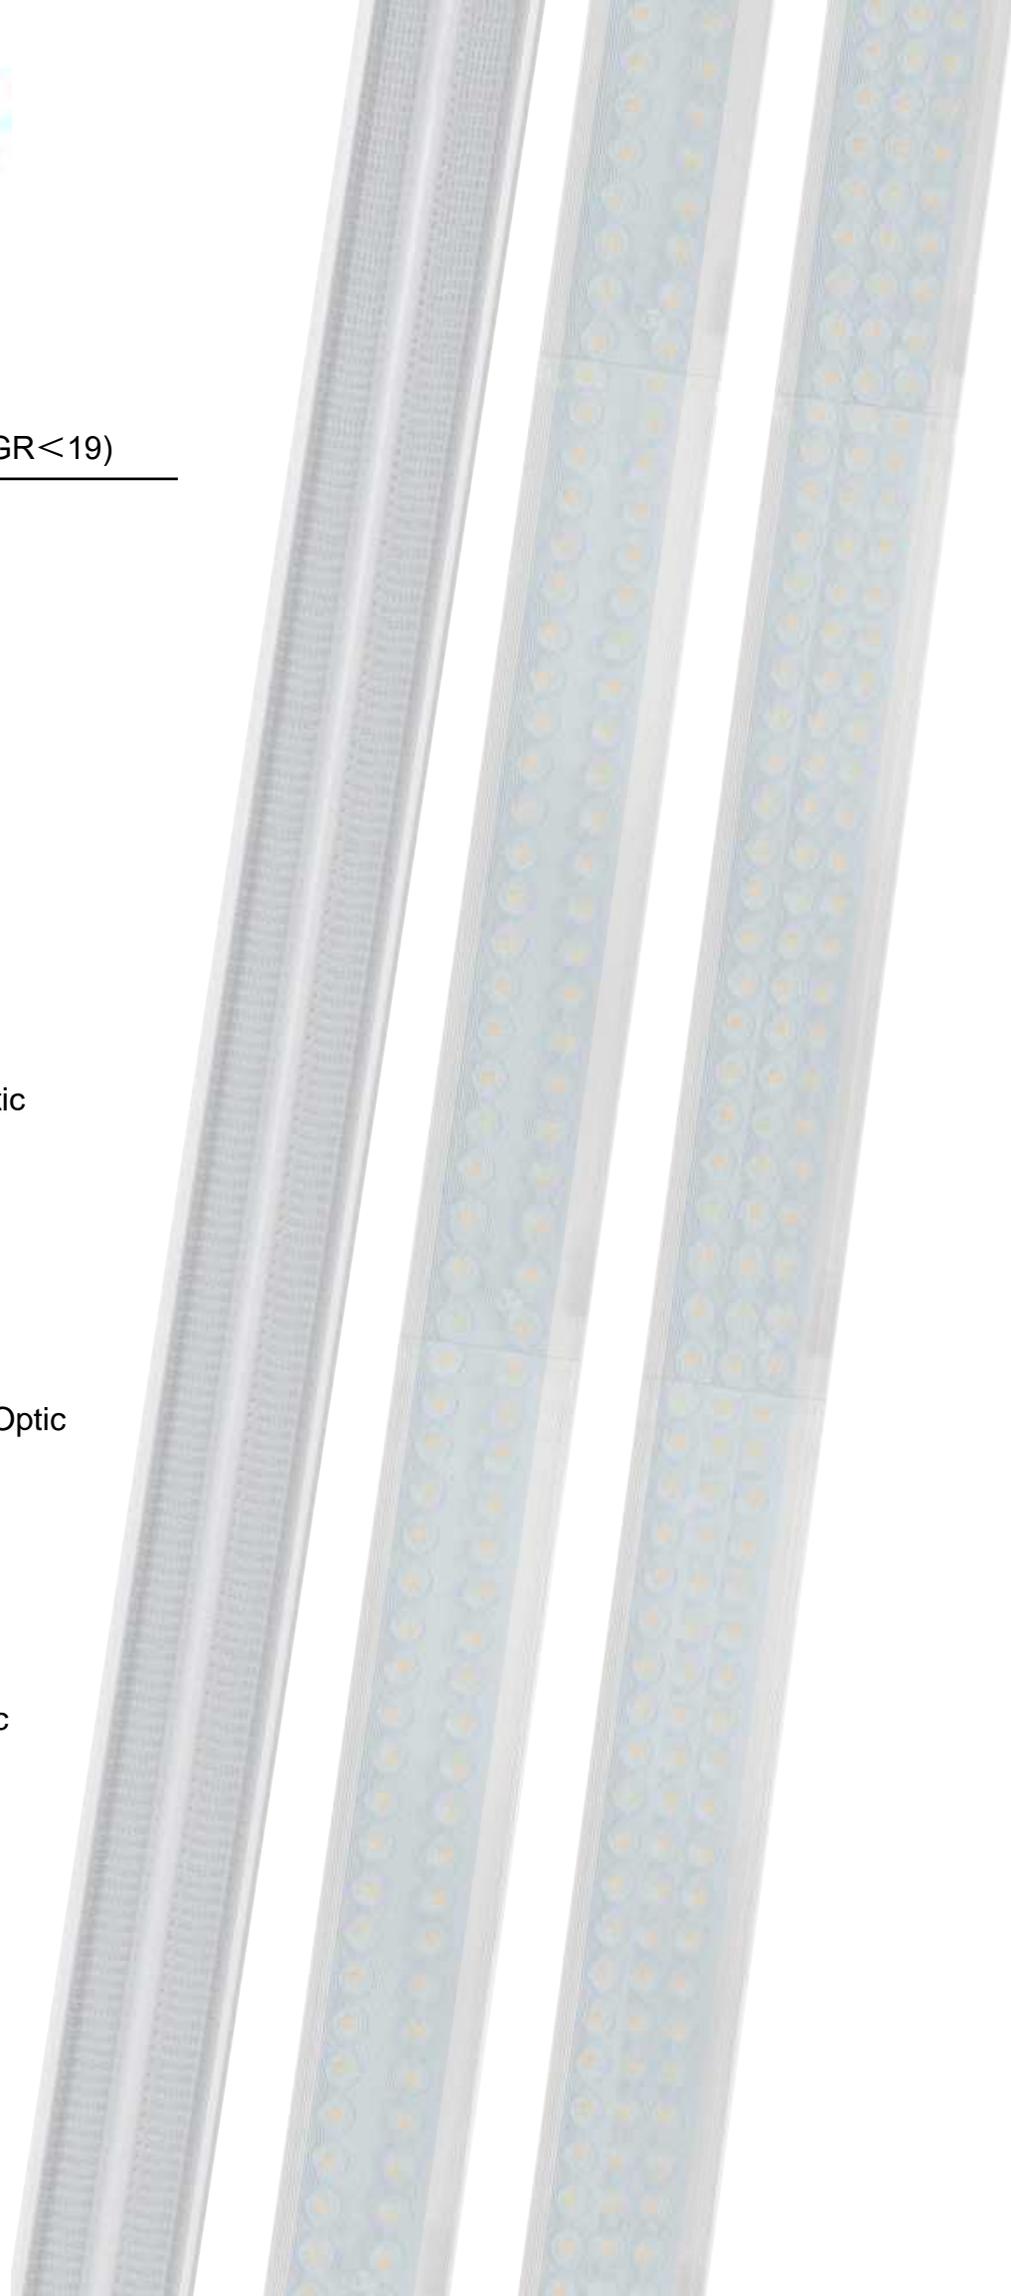

LUMOLUX



Accessories



Feed In Connector



End Cap



Suspension Cord

TRUNKING RAIL

