




**200LM/W**


# AURA Back-lit LED Pane Light



**HIGH  
EFFICACY**  
up to 200LM/W

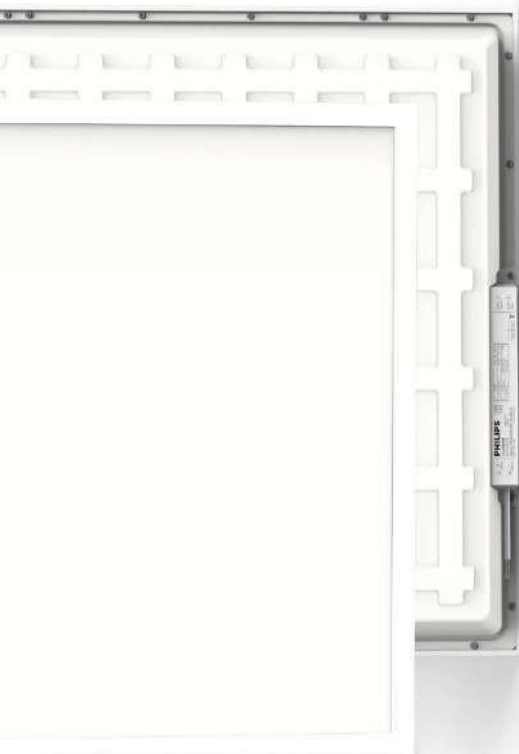


**PHILIPS DRIVER**

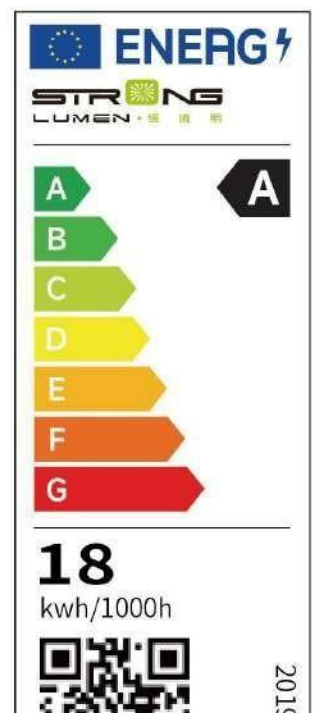


## Technical Data


|                       |                                                        |      |                                                                                 |      |                                                   |      |
|-----------------------|--------------------------------------------------------|------|---------------------------------------------------------------------------------|------|---------------------------------------------------|------|
| Item No./Code         | AU 301218-3K-U19 (831831)<br>AU 301218-4K-U19 (831841) |      | AU 606018-4K (811830)<br>AU 606018-3K-U19 (811831)<br>AU 606018-4K-U19 (811841) |      | AU 626218-4K (821840)<br>AU 626218-4K-U19(821841) |      |
| P F                   | ≥0.95                                                  |      |                                                                                 |      |                                                   |      |
| Efficacy (lm/W)±5%    | 200                                                    |      |                                                                                 |      |                                                   |      |
| Power Switchable(W)   | 18                                                     | 25   | 18                                                                              | 25   | 18                                                | 25   |
| Lumen Output±5%       | 3600                                                   | 5000 | 3600                                                                            | 5000 | 3600                                              | 5000 |
| CRI                   | Ra>80                                                  |      |                                                                                 |      |                                                   |      |
| Input Voltage(V)      | 220-240VAC                                             |      |                                                                                 |      |                                                   |      |
| Driver                | PHILIPS                                                |      |                                                                                 |      |                                                   |      |
| CCT Switchable        | 3000K-4000K-6000K                                      |      |                                                                                 |      |                                                   |      |
| Warranty              | 5 Years                                                |      |                                                                                 |      |                                                   |      |
| IP rate               | IP20                                                   |      |                                                                                 |      |                                                   |      |
| Operating Temperature | -10℃ to 45℃                                            |      |                                                                                 |      |                                                   |      |
| LED Type              | SMD 2835                                               |      |                                                                                 |      |                                                   |      |
| Certification         | TUV CE ERP LM79 ROHS                                   |      |                                                                                 |      |                                                   |      |

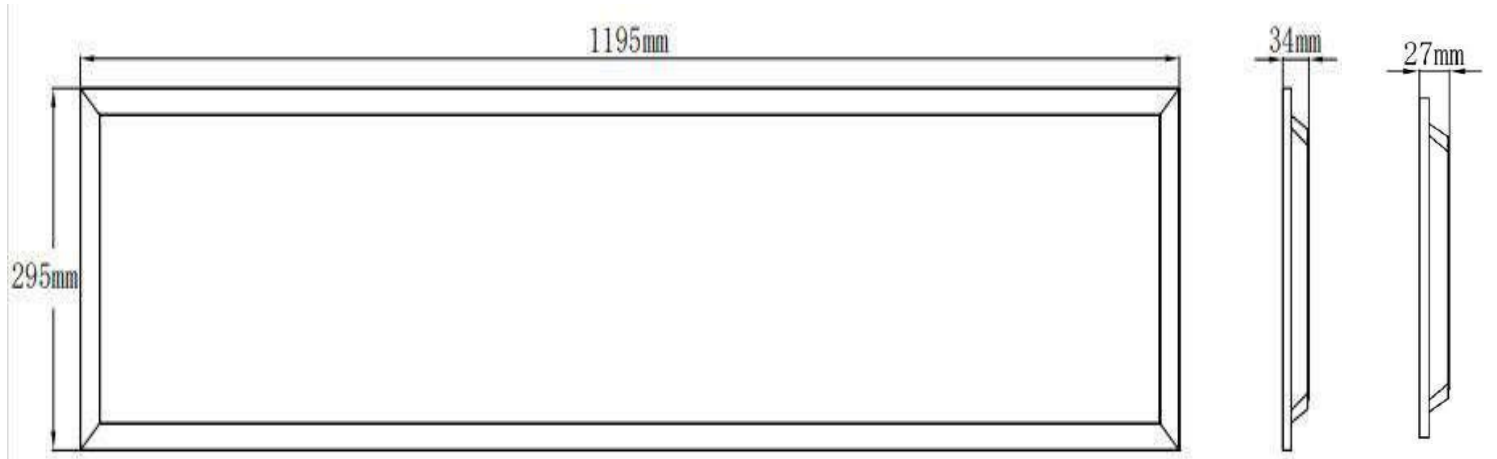

AU 301218-3K-U19  
AU 301218-4K-U19

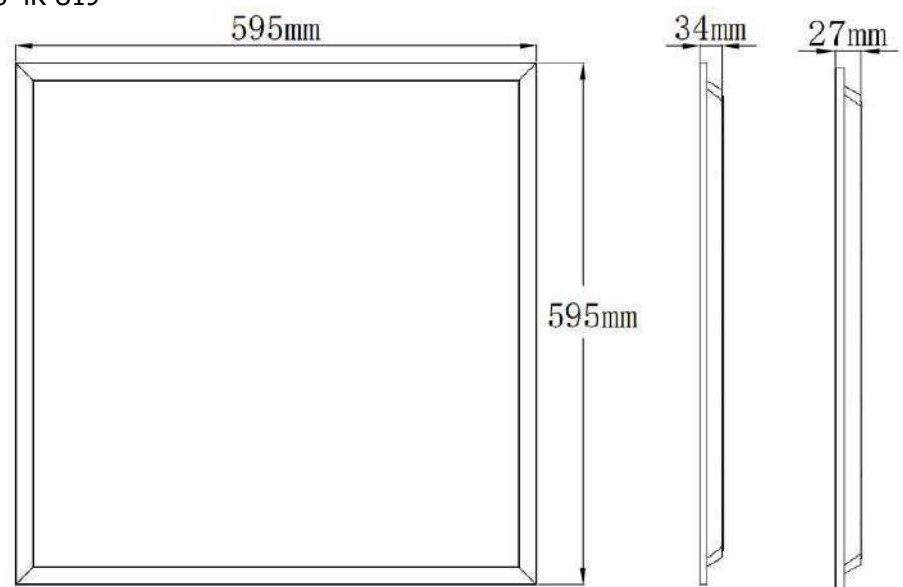

AU 606018-4K  
AU 606018-3K-U19  
AU 606018-4K-U19

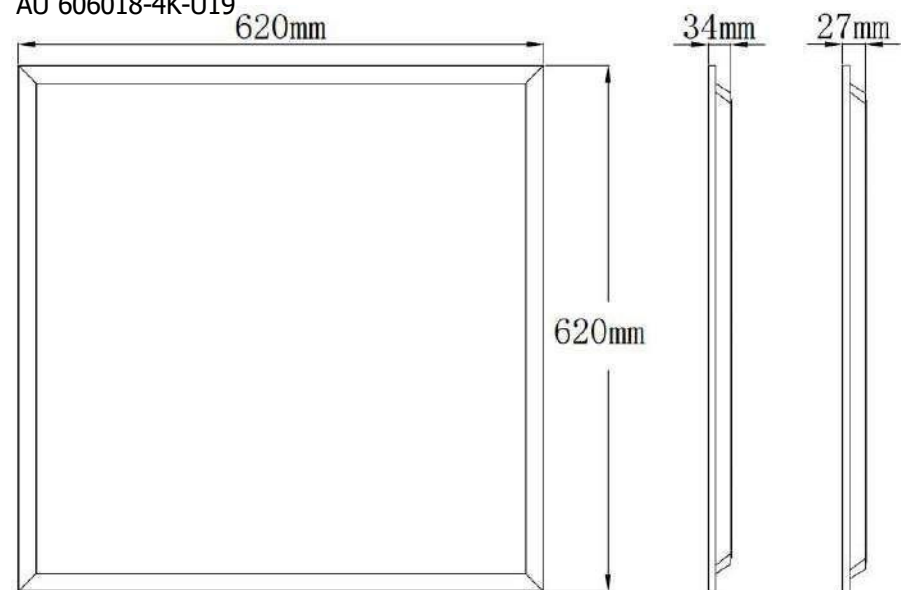

AU 626218-4K  
AU 626218-4K-U19

## Introduction of Product Settings



### Adjustable Power

- There is a power switch button on the power supply to adjust the power
- When The Power Switchable Botton Is At 18W Is 18W, At 25W Is 25W
- Philips power supply has passed the following certifications: CE, ENEC, UKCA and CCC.



### CCT Switchable

- There is a base with switchable color temperature on the lamp
- When The CCT Switchable Botton Is At 3000K Is 3000K, At 4000K Is 4000K
- CCT Can Be Freely Combined, Such as 3000K+4000K, 3000K+6000K, 4000K+6000K, 3000K+4000K+5000K etc



## Product Structure Diagram

