



LT838P LED Linear Track Light



- 1 Power input terminal
- 4 Power Selectable
- 2 3-phase adjustable L1/L2/L3
- 5 CCT Selectable
- 3 Flexible optics combinations
- 6 Aluminum housing color white or black

SMD
2835

5 yrs
WARRANTY

CRI
>80

160
LM/W

IP20

IK08

CE

RoHS

ENERGY CLASS
B
EU 2019/2015


White color

Code	Size(mm) (L×W×H)	Power (W)	CCT (K)	Lumen (lm)	Effi. (lm/W)	PF	CRI	Beam Angle	Dimmable	IP	Energy Class
111171	556×61×56	24/20/16/12	3000/4000/5000	3840/4440	160/185	≥0.9	80	90°	No	IP20	D/B
111272	1108×61×56	42/38/34/30	3000/4000/5000	6270/7770	160/185	≥0.9	80	90°	No	IP20	D/B
111373	1384×61×56	55/50/45/40	3000/4000/5000	8800/10175	160/185	≥0.9	80	90°	No	IP20	D/B


Black color

Code	Size(mm) (L×W×H)	Power (W)	CCT (K)	Lumen (lm)	Effi. (lm/W)	PF	CRI	Beam Angle	Dimmable	IP	Energy Class
121171	556×61×56	24/20/16/12	3000/4000/5000	3840/4440	140/160	≥0.9	80	90°	No	IP20	D/B
121272	1108×61×56	42/38/34/30	3000/4000/5000	6270/7770	140/160	≥0.9	80	90°	No	IP20	D/B
121373	1384×61×56	55/50/45/40	3000/4000/5000	8800/10175	140/160	≥0.9	80	90°	No	IP20	D/B

Driver rotatable left and right.

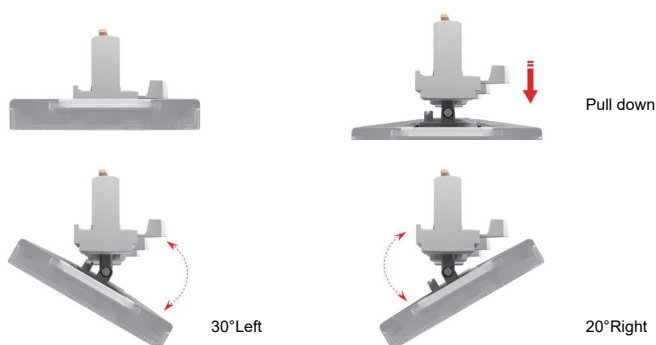


PRM



Double. Lens. Optic


Power selectable

602m			1198m			1496m		
1	2	Watts	1	2	Watts	1	2	Watts
OFF	OFF	12	OFF	OFF	40	OFF	OFF	51
ON	OFF	16	ON	OFF	45	ON	OFF	56
OFF	ON	20	OFF	ON	50	OFF	ON	61
ON	ON	24	ON	ON	55	ON	ON	66

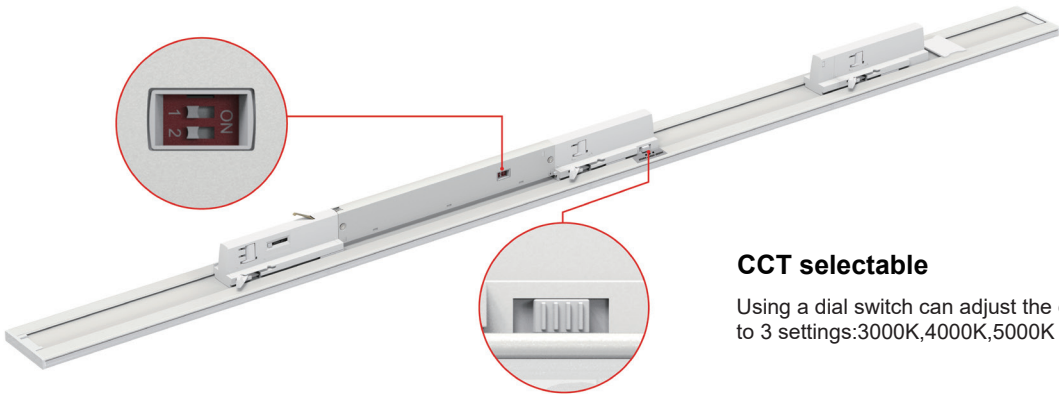


CCT selectable
Using a dial switch can adjust the color temperature to 3 settings:3000K,4000K,5000K

European standard:4 wires, 3 phases Track System

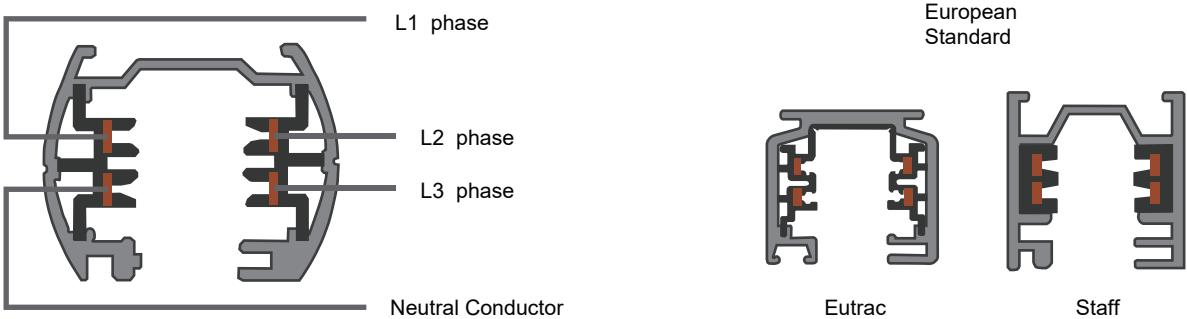

Drawing

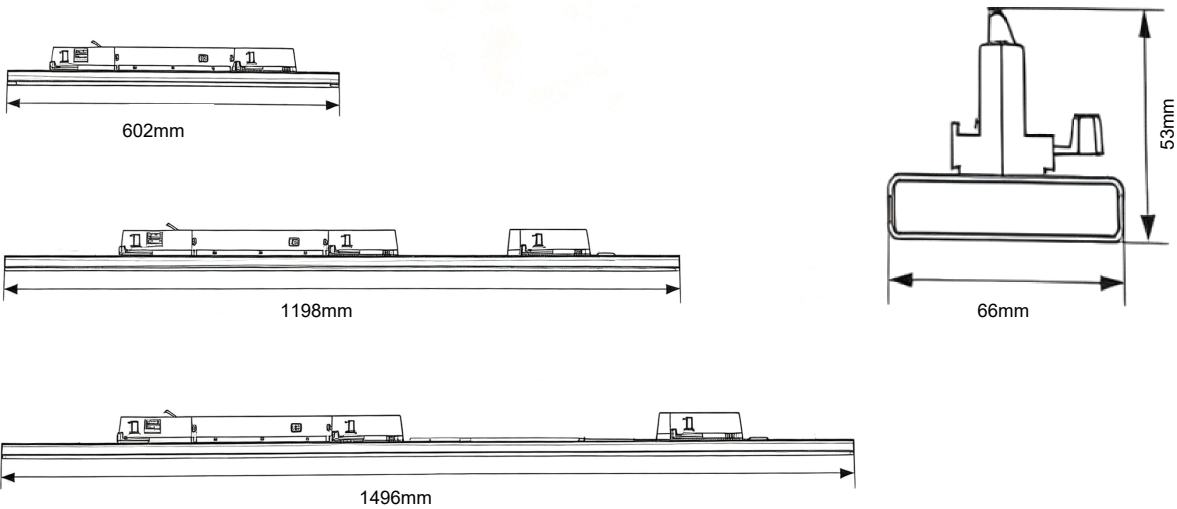

Versatile Applications



Retail Spaces



Supermarkets · Retail Stores · Sales Floors

Optics: Single-sided or double-sided light output.

Advantage: Delivers uniform, glare-free shelf lighting, enhancing product visibility and improving product presentation while minimizing unnecessary light spill in aisle areas.



Office



Office Spaces · Meeting Rooms · Workstations · Corridors · Transit Areas

Optics: Single-sided or double-sided light output.

Advantage: Provides comfortable and uniform illumination that enhances visual comfort, reduces screen glare, and supports productive working environments.



Warehouse



Warehouses · Logistics Centers · High-Bay Facilities

Optics: 30°, 60°, or 90° beam angles.

Advantage: Multiple beam angle options enable optimal adaptation to different rack heights, delivering precise and deep-reaching illumination across all storage areas.



Packing Details

Code	Packing Qty .	Carton Size (L×W×H)	Volumetric Weight	Net Weight	Gross Weight	Model No.
111121	10pcs/Carton, 1pc/Inner box	63.5×34.5×19cm	8.4KG	5KG	8.2KG	LT838A-06W-24W3C3W
111223	10pcs/Carton, 1pc/Inner box	126×44×23cm	25.5KG	13.8KG	13.8KG	LT838A-15W-55W3C3W
111324	10pcs/Carton, 1pc/Inner box	156×44×23cm	31.5KG	16.6KG	16.6KG	LT838A-15W-66W3C3W
121121	10pcs/Carton, 1pc/Inner box	63.5×34.5×19cm	8.4KG	5KG	8.2KG	LT838A-06B-24W3C3W
121223	10pcs/Carton, 1pc/Inner box	126×44×23cm	25.5KG	9.6KG	13.8KG	LT838A-15B-55W3C3W
121324	10pcs/Carton, 1pc/Inner box	156×44×23cm	31.5KG	11.6KG	16.6KG	LT838A-15B-66W3C3W
112324	10pcs/Carton, 1pc/Inner box	126×44×23cm	25.5KG	9.6KG	13.8KG	LT838A-15W-66W3C3WD
122324	10pcs/Carton, 1pc/Inner box	156×44×23cm	31.5KG	11.6KG	16.6KG	LT838A-15B-66W3C3WD
111171	10pcs/Carton, 1pc/Inner box	66.5×34.5×24cm	11.1KG	6.5KG	7KG	LT838P-06W24W3C3W
111272	10pcs/Carton, 1pc/Inner box	126×34.5×24cm	20.9KG	9.5KG	11.5KG	LT838P-12W42W3C3W
111373	10pcs/Carton, 1pc/Inner box	156×34.5×24cm	25.9KG	10.4KG	13.1KG	LT838P-15W55W3C3W
121171	10pcs/Carton, 1pc/Inner box	66.5×34.5×24cm	11.1KG	6.5KG	7KG	LT838P-06B24W3C3W
121272	10pcs/Carton, 1pc/Inner box	126×34.5×24cm	20.9KG	9.5KG	11.5KG	LT838P-12B42W3C3W
121373	10pcs/Carton, 1pc/Inner box	156×34.5×24cm	25.9KG	10.4KG	13.1KG	LT838P-15B55W3C3W

