



HB015 LED High Bay Light

1X > 2X > 3X
3000K 4000K 6000K



3 CCT
SELECTABLE




100%-80%-60%

3 POWER
SELECTABLE



0-10V
DIMMABLE



90°/120°



SMD
2835



5 yrs
WARRANTY



CE



IP65



IK07



CRI
>70




RoHS

Code	Size (DxHmm)	Power (W)	CCT (K)	Lumen (lm)	Effi. (lm/W)	PF	CRI	Beam Angle	Driver	IP	Class
121111	Ø250×143	100/81/65	3000/4000/6000	16000	160	0.97	≥70	90°±3	PHILIP	IP65	Class I
121311	Ø320×147	200/165/120	3000/4000/6000	32000	160	0.97	≥70	90°±3	PHILIP	IP65	Class I

Features & Benefits

- 160 lm/W high efficiency with 50,000h lifetime reduces energy and maintenance costs for long-term industrial operation.
- 100W–200W wide power range with DIP switch and 3CCT selection enables one fixture to cover multiple project requirements.
- IP65, IK08 and die-cast aluminum housing ensure reliable performance in harsh industrial environments.
- 90° high-efficiency optical system with AC100–277V and PF>0.97 provides stable, uniform and energy-efficient lighting globally.

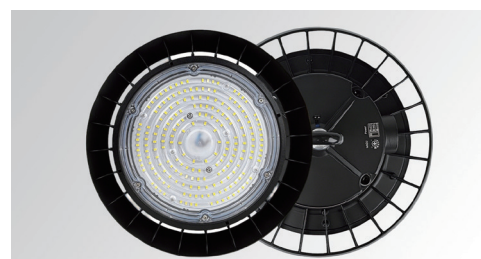

Packing Details

Code	Packing Qty.	Carton Size (L×W×H)	Gross Weight	Model No.
121111	4pcs/Carton 1pc/Inner box	78×41×40cm	8.2KG	HB015-100W
121311	4pcs/Carton 1pc/Inner box	78×41×40cm	12.2KG	HB015-200W