




LR712 LED Linear Trunking System



- 1 Lock holder
- 2 3-phase adjustable L1/L2/L3
- 3 Power Selectable
- 4 CCT Selectable
- 5 Flexible Linear Configurations
- 6 Connecting plate
- 7 Optional for 5 wiring or 7 wiring
- 8 Aluminum housing white color



1X > 2X > 3X
3000K 4000K 5000K
3 CCT
SELECTABLE

4 POWER
SELECTABLE



FLICKER
FREE

Central lens

Code	Size(mm) (L×W×H)	Power (W)	CCT (K)	Lumen (lm)	Effi. (lm/W)	PF	CRI	Beam Angle	Dimmable	IP	Energy Class
111211	1197×66×67	42/38/34/30	3000/4000/5000	6720/8400	160/200	≥ 0.9	80	90°	No	IP20	D/B
111312	1495×66×67	50/51//47/43	3000/4000/5000	8000/10000	160/200	≥ 0.9	80	90°	No	IP20	D/B
111313	1495×66×67	70/60/65/55	3000/4000/5000	11200/14000	160/200	≥ 0.9	80	90°	No	IP20	D/B
112313	1495×66×67	70/60/65/55	3000/4000/5000	11200/14000	160/200	≥ 0.9	80	90°	DALI	IP20	D/B

Triple lens




Code	Size(mm) (L×W×H)	Power (W)	CCT (K)	Lumen (lm)	Effi. (lm/W)	PF	CRI	Beam Angle	Dimmable	IP	Energy Class
111221	1197×66×67	42/38/34/30	3000/4000/5000	6720/8400	160/200	≥ 0.9	80	90°	No	IP20	D/B
111322	1495×66×64	50/51//47/43	3000/4000/5000	8000/10000	160/200	≥ 0.9	80	90°	No	IP20	D/B
111333	1495×66×64	70/60/65/55	3000/4000/5000	11200/14000	160/200	≥ 0.9	80	90°	No	IP20	D/B
112333	1495×66×67	70/60/65/55	3000/4000/5000	11200/14000	160/200	≥ 0.9	80	90°	DALI	IP20	D/B

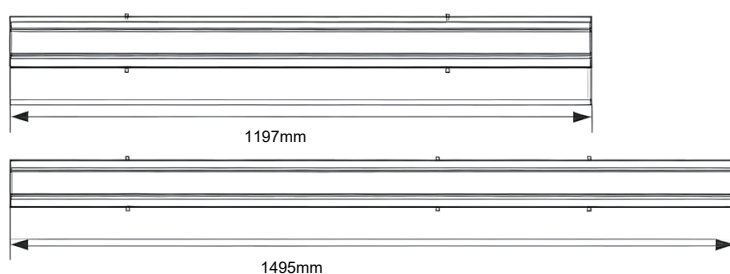



Features & Benefits


- Modular design
- Quick installation
- Continuous power supply system
- Optional for DALI Dimming Control, Emergency lighting

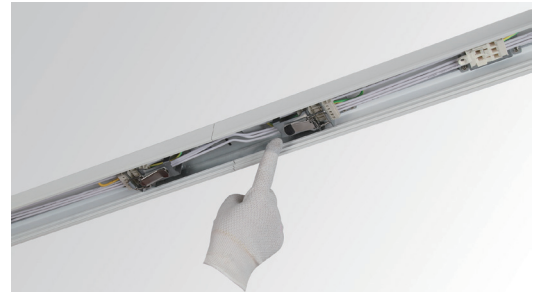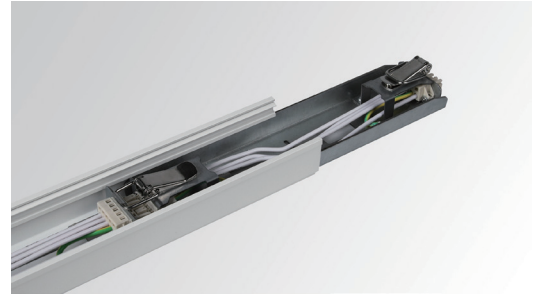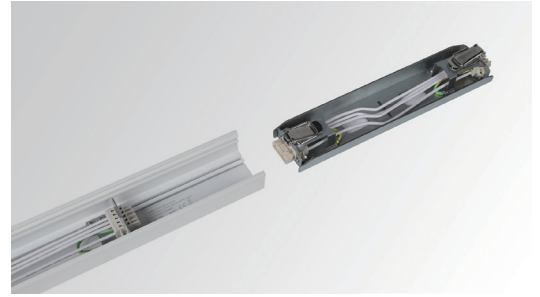

Versatile Applications



Industrial

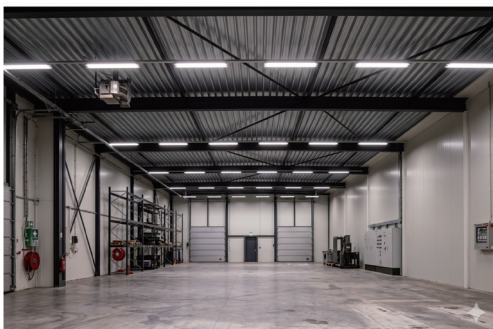

Production workshops • Wood&Paper&Textile processings • Food productions • Automotive industry

Advantage: A modular lighting system designed to reduce installation costs, improve operational efficiency, and deliver long-term energy savings in industrial environments.



Warehouse



Warehousing • Logistic spaces • High-bay warehouses

Optics: 30°, 60°, or 90° beam angles.

Advantage: Various beam angles allow perfect adaptation to different rack heights, delivering penetrating, deep-reaching lighting for all storage zones.



End cap




Mounting clip



Steel suspension cable 2m&5m



Trunking rail connector




Feed in connector



Trunking rail 1.2m&1.5m


Code	Related Accessories
140101	LR712B End Cap
140102	LR712C End Cap
140103	LR712 Mounting Clip
140104	LR712 Steel Suspension Cable 5M
140105	LR712 Steel Suspension Cable 2M
140106	LR712 Trunking Rail Connector
140107	LR712 Feed In Connector
140108	LR712 Trunking Rail 1.2M
140109	LR712 Trunking Rail 1.5M
140110	LR712B 1.2M white covers, central line optic
140111	LR712C 1.2M white covers, triple line optic
140112	LR712B 1.5M white covers, central line optic
140113	LR712C 1.5M white covers, triple line optic

Optional for 5-wiring or 7-wiring
Power cable diameter 2.5mm²

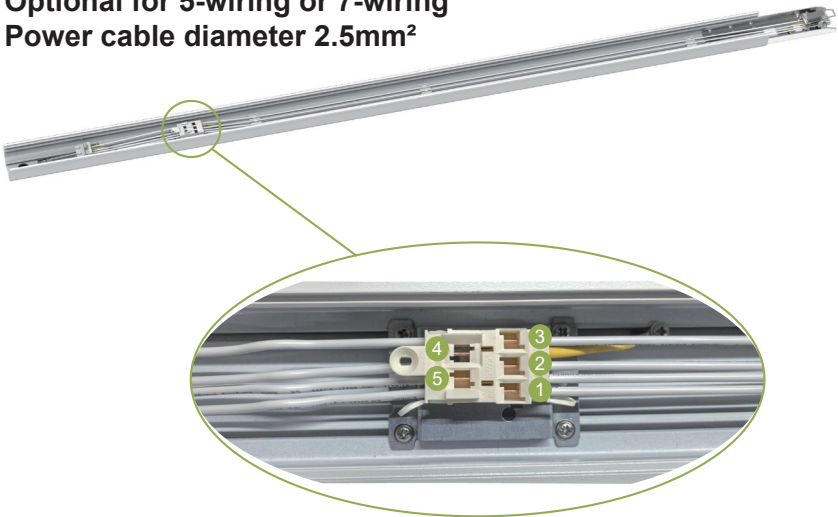


- 1 L1 phase
- 2 L2 phase
- 3 L3 phase
- 4 PE
- 5 N

- 1 DALI
- 2 PE
- 3 N
- 4 L1 phase
- 5 L2 phase
- 6 L3 phase
- 7 DALI

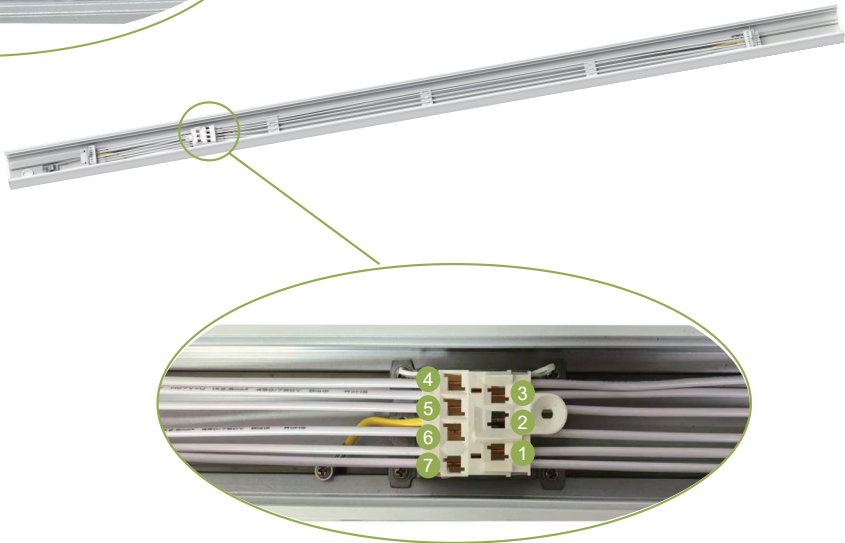

Emergency lighting

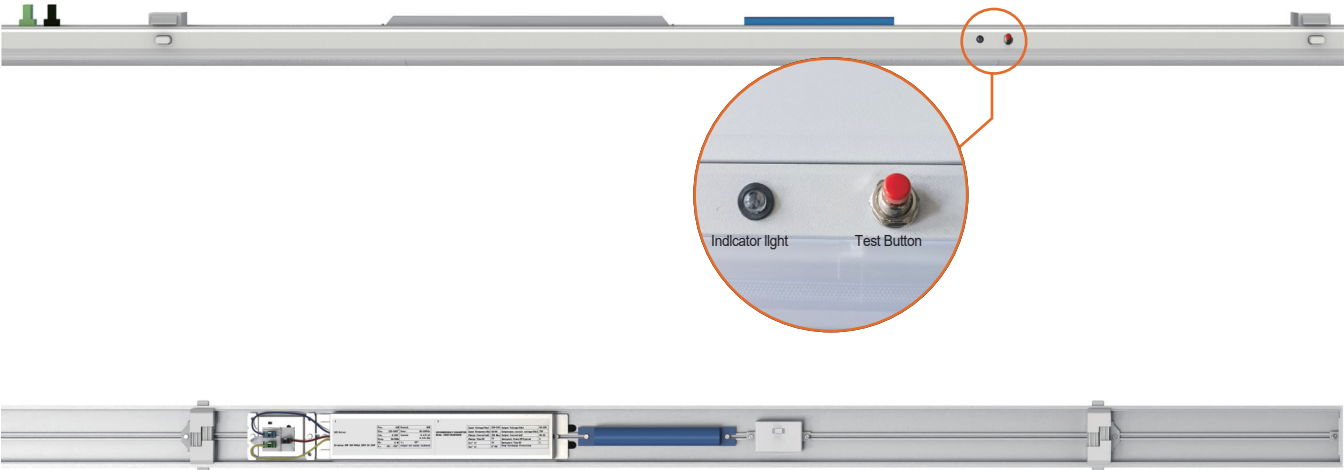

L/N	L-CHR /N -CHR	Battery	Emergency Power	Duration time
OFF	ON	/	/	0%
OFF	OFF	1800mAh	2.5W	3 hours
OFF	OFF	3600mAh	5W	3 hours

Packing Details

Luminaire

Code	Packing Qty .	Carton Size (L×W×H)	Volumetric Weight	Net Weight	Gross Weight	Model No.
111211	5pcs/Carton, 1pc/Inner box	126×35×18cm	15.9KG	5.4KG	8.2KG	LR712B-12-42W3C3W
111312	5pcs/Carton, 1pc/Inner box	156×32×18cm	19.7KG	6.5KG	9.9KG	LR712B-15-50W3C3W
111313	5pcs/Carton, 1pc/Inner box	156×32×18cm	19.7KG	6.5KG	9.9KG	LR712B-15-75W3C3W
111221	5pcs/Carton, 1pc/Inner box	126×35×18cm	15.9KG	5.4KG	8.2KG	LR712C-12-42W3C3W
111322	5pcs/Carton, 1pc/Inner box	156×32×18cm	19.7KG	6.5KG	9.9KG	LR712C-15-50W3C3W
111333	5pcs/Carton, 1pc/Inner box	156×32×18cm	19.7KG	6.5KG	9.9KG	LR712C-15-75W3C3W
112313	5pcs/Carton, 1pc/Inner box	156×32×18cm	19.7KG	6.5KG	9.9KG	LR712B-15-70W3C3WD
112333	5pcs/Carton, 1pc/Inner box	156×32×18cm	19.7KG	6.5KG	9.9KG	LR712C-15-70W3C3WD

Trunking rail

Code	Packing Qty .	Carton Size (L×W×H)	Volumetric Weight	Net Weight	Gross Weight	Model No.
140108	5pcs/Carton 1pc/ Inner box	126×32×18cm	14.6KG	4.6KG	7.3KG	LR712 Trunking Rail 1.2M
140109	5pcs/Carton 1pc/ Inner box	156×32×18cm	18KG	5.8KG	9.1KG	LR712 Trunking Rail 1.5M

